WINSTAR Display

OLED SPECIFICATION

Model No:

WEF012864G

WINSTAR


WEF012864G

General Specification

Item	Dimension	Unit		
Dot Matrix	128 x 64			
Module dimension	77.2 × 42.14 × 3.4	mm		
Active Area	55.01 × 27.49	mm		
Pixel Size	0.40 × 0.40	mm		
Pixel Pitch	0.43 × 0.43	mm		
Display Mode	Passive Matrix			
Display Color	Monochrome			
Drive Duty	1/64 Duty			
IC	SSD1309			
Interface	6800,8080,4-Wire SPI,I2C			
Size	2.42 inch			

WINSTAR

Contour Drawing & Block Diagram

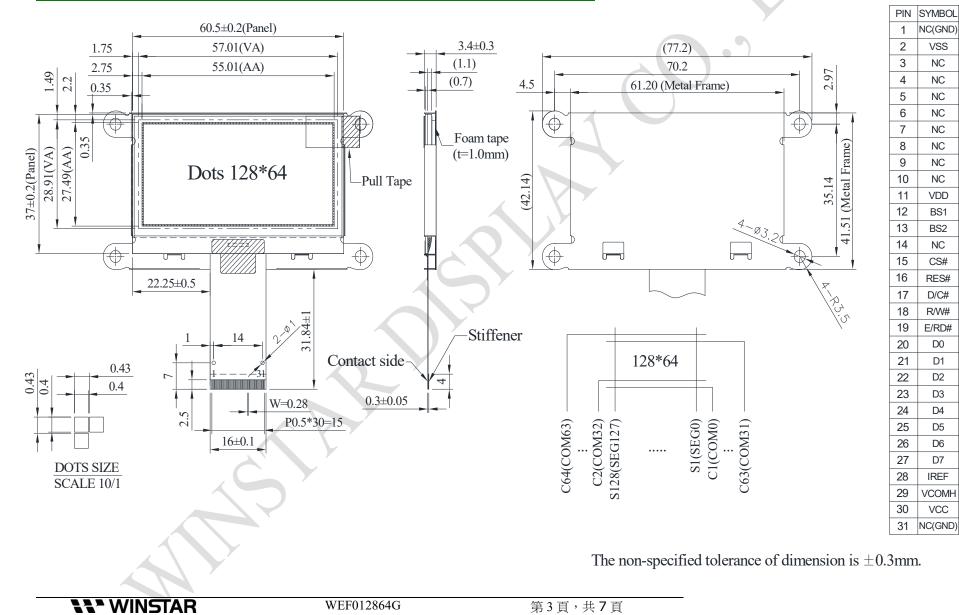

Interface Pin Function

	No.	Symbol	Function					
	1	NC(GND)	No connection					
	2	VSS	Ground.					
	3-10	NC	No connection					
	11	VDD	ower supply pin for core logic operation					
	12	BS1	MCU bus interface selection pins. Select appropriate logic setting as described in the following table. BS2 and BS1 are pin select BS1 BS2 I2C 1					
	13	BS2	4-wire Serial 0 0 8-bit 68XX Parallel 0 1 8-bit 80XX Parallel 1 1					
	13	во2	Note (1) 0 is connected to VSS (2) 1 is connected to VDD					
	14	NC	No connection This pin is the chip select input connecting to the MCU. The chip is enabled for MCU communication only when CS# is pulled LOW (active LOW). This pin is reset signal input. When the pin is pulled LOW, initialization of the chip is executed. Keep this pin pull HIGH during normal operation.					
	15	CS#						
	16	RES#						
	17	D/C#	This pin is Data/Command control pin connecting to the MCU. When the pin is pulled HIGH, the data at D[7:0] will be interpreted as data. When the pin is pulled LOW, the data at D[7:0] will be transferred to a command register. In I2C mode, this pin acts as SA0 for slave address selection.					
U.S.	18	R/W#	This pin is read / write control input pin connecting to the MCU interface. When 6800 interface mode is selected, this pin will be used as Read/Write (R/W#) selection input. Read mode will be carried out when this pin is pulled HIGH and write mode when LOW. When 8080 interface mode is selected, this pin will be the Write (WR#) input Data write operation is initiated when this pin is pulled LOW and the chip is selected. When serial or I2C interface is selected, this pin must be connected to VSS.					

31	NC(GND)	voltage supply pin. No connection	
30	VCC	Power supply for panel driving voltage. This is also the most positive power	
29	9 VCOMH COM signal deselected voltage level. A capacitor should be connected between this pin and VSS.		
28	IREF	This pin is the segment output current reference pin. IREF is supplied externally.	
20~27	These pins are bi-directional data bus connecting to the MCU data bu Unused pins are recommended to tie LOW. When serial interface mode is selected. D0 will be the serial clock input		
19	E/RD#	This pin is MCU interface input. When 6800 interface mode is selected, this pin will be used as the Enable (E) signal. Read/write operation is initiated when this pin is pulled HIGH and the chip is selected. When 8080 interface mode is selected, this pin receives the Read (RD#) signal. Read operation is initiated when this pin is pulled LOW and the chip is selected. When serial or I2C interface is selected, this pin must be connected to VSS.	

N^{*} WINSTAR

Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit	Notes
Supply Voltage for Logic	VDD	-0.3	4.0	V	1, 2
Supply Voltage for Display	VCC	0	15.0	V	1, 2
Operating Temperature	TOP	-40	+80	°C	
Storage Temperature	TSTG	-40	+85	°C	-

Electrical Characteristics

DC Electrical Characteristics

ltem	Symbol	Condition	Min	Тур	Мах	Unit
Supply Voltage for Logic	VDD		1.65	3.0	3.3	V
Supply Voltage for Display	VCC	Ċ	12.5	13	13.5	V
High Level Input	VIH		0.8×VDD	_	_	V
Low Level Input	VIL	_	—	_	0.2×VDD	V
High Level Output	VOH	_	0.9×VDD	_	_	V
Low Level Output	VOL	_	—	_	0.1×VDD	V
50% Check Board operating	VCC =13.0V		18	27	mA	