



WINSTAR Display Co.,Ltd.
華凌光電股份有限公司



SPECIFICATION

MODEL NO. : WLOF0007000A8GAAFSA04

Summary

7 Inch Smart Display (CAN series) Features



1. +12V power supply input with 8V to 35V dynamic range power input, the power consumption is around 6 Watt.
2. Self-testing after booting function.
3. CAN bus communication interface.
4. Supports Custom CAN ID protocol, default baud rate at 250Kbps.
5. Built in 32MB external flash memory to store the font and Object Dictionary Data.
6. Support capacitive touch panel (CTP).
7. Build in buzzer and can be controlled by Master Device.
8. Demo set HOST can be used on multiple platforms, such as Computer (with USB to CAN Dongle), MCU, Raspberry Pi (with PiCAN2).
9. GPIO PIN support with 3.3V TTL.

Product information

General information


Item	Standard Value	Unit
Operating voltage	8~35	Vdc
Communication Interface	CAN bus	--
MCU	STM32F746	N/A
Flash Memory	32	MB
SDRAM Memory	16	MB
LCD display size	7.0	inch
Dot Matrix	1024 x RGB x 600(TFT)	dot
Module dimension	184.1(W) x 103.8(H) x 22(D)	mm
Active area	154.2144 x 85.92	mm
Pixel pitch	0.1506 x 0.1432	mm
Brightness	Min:400; Typ:450	cd/m ²
LCD type	TFT, Normally Black, Transmissive	
View Direction	85/85/85/85	
Aspect Ratio	16:9	
Touch Panel	With PCAP	
Surface	Glare	

Contour Drawing

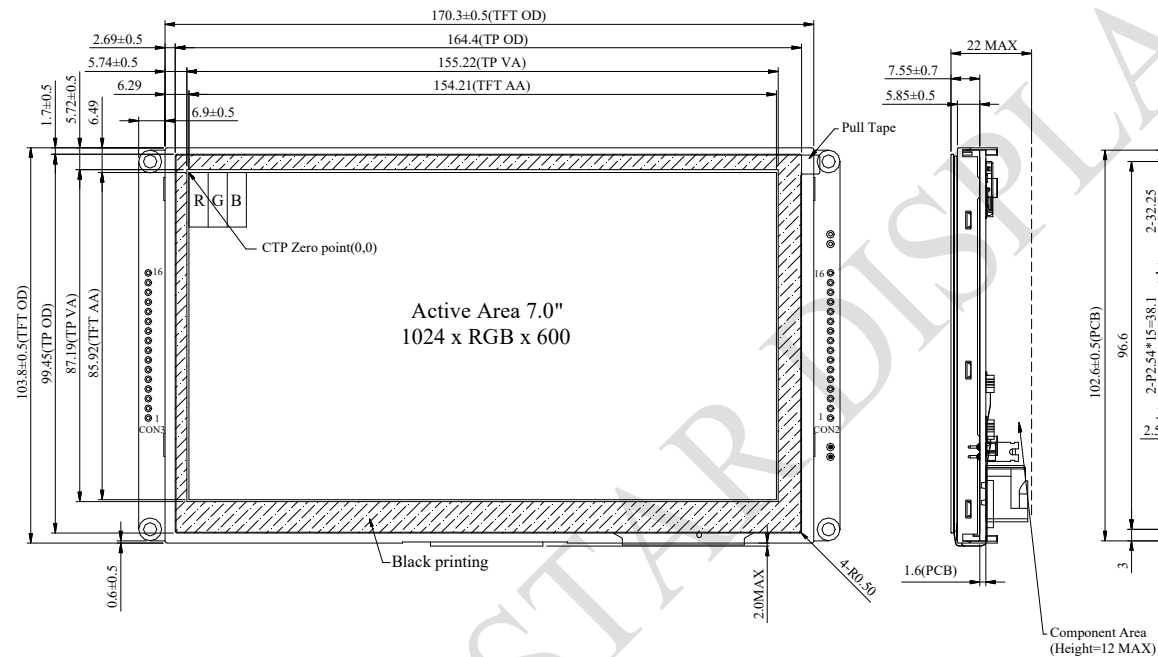

CON2			
PIN	SYMBOL	PIN	SYMBOL
1	VIN	9	VBUS
2	GND	10	Resavee
3	CAN_H	11	Reaseve
4	CAN_L	12	GND
5	GND	13	VIN
6	GND	14	Reserve
7	Reserve	15	Reserve
8	Reserve	16	GND

CON3			
PIN	SYMBOL	PIN	SYMBOL
1	+3V3	9	IO_0
2	SWCLK	10	IO_1
3	GND	11	IO_2
4	SWDIO	12	IO_3
5	NRST	13	IO_4
6	GND	14	IO_5
7	WKUP	15	IO_6
8	BOOT0	16	IO_7

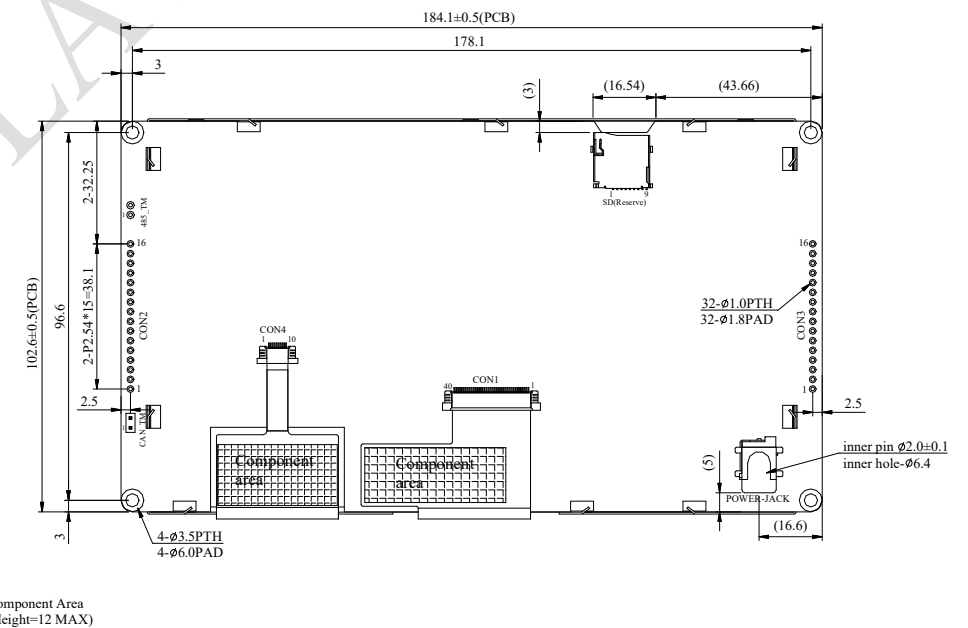

The non-specified tolerance of dimension is $\pm 0.3\text{mm}$.

Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	TOP	-20	—	+70	°C
Storage Temperature	TST	-30	—	+80	°C


Electrical Characteristics

Item	Symbol	Condition	Min	Typ	Max	Unit
Supply Voltage	VIN	—	8	12	35	V
Operating current	I(mA)	—	—	520	—	mA

BOM

Item	Description
LCM	WF70A8TYAHLNGB#
PCBA	SV10007R00A8K00N0107

Block diagram

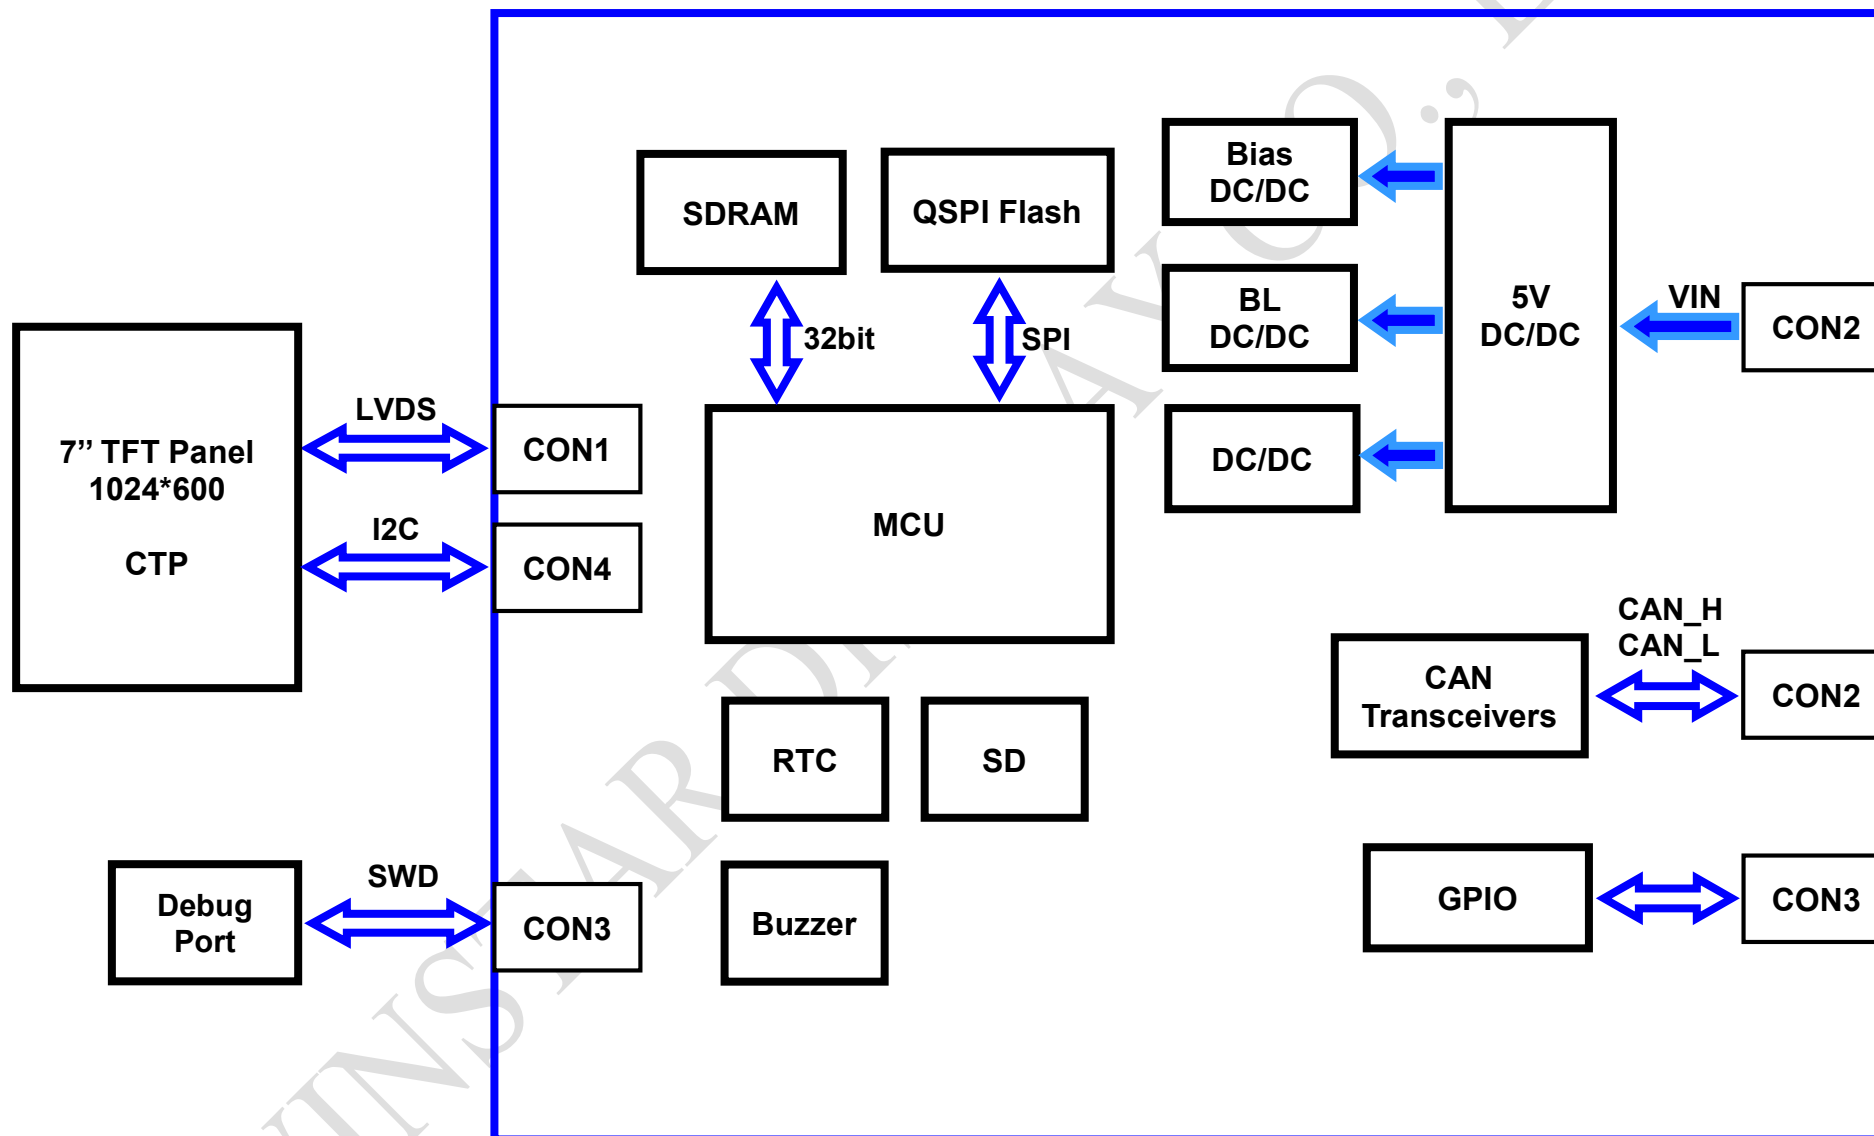

Interface

CON2 definition:

Pin	Symbol	Function	Remark
1	VIN	Power supply V+	Input
2	GND	Power supply GND	Input
3	CAN_H	CAN bus High	I/O
4	CAN_L	CAN bus Low	I/O
5	GND	Power supply GND	Input
6	GND	Power supply GND	Input
7	Reserve	—	—
8	Reserve	—	—
9	VBUS	—	—
10	Reserve	UART RX interface(Reserve)	Reserve
11	Reserve	UART TX interface(Reserve)	Reserve
12	GND	GND	GND
13	Reserve	—	—
14	Reserve	—	—
15	Reserve	—	—
16	GND	GND	GND

CON3 definition:

Pin	Symbol	Function	Remark
1	+3V3	3.3V power for JTAG interface	Output
2	SWCLK	CLK pin for JTAG interface	Input
3	GND	GND for JTAG interface	Output
4	SWDIO	Data pin for JTAG interface	I/O
5	NRST	Reset pin for JTAG interface	Input
6	GND	Power GND	Output
7	Wkup	WKup,ADC,Timer,Event,I/O	Input
8	BOOT0	Lo: Internal flash boot (Default) Hi: External flash boot	Input
9	IO_0	ADC,DAC,Timer,Event,I/O @3.3V	PA5
10	IO_1	ADC,Timer,Event,I/O @3.3V	PA6
11	IO_2	ADC,Timer,Event,I/O @3.3V	PA7
12	IO_3	ADC,Timer,Event,I/O @3.3V	PA8
13	IO_4	ADC,Timer,Event,I/O @3.3V	PC13
14	IO_5	ADC,Timer,Event,I/O @3.3V	PB11
15	IO_6	ADC,Timer,Event,I/O @3.3V	PA15
16	IO_7	RST,ADC,Event,I/O @3.3V	PD11

@3.3V : I/O allow below 3.3V input, If exceeding 3.3V may cause MCU damage