TFT DISPLAY SPECIFICATION



WINSTAR Display Co.,Ltd.

華凌光電股份有限公司

Winstar Display Co., LTD
華凌光電股份有限公司
WEB: https://www.winstar.com.tw E-mail: sales@winstar.com.tw

SPECIFICATION

CUSTOMER : _____

MODULE NO.: WF80GSYFUMHGV

APPROVED BY: **(FOR CUSTOMER USE ONLY)**	**PCB VERSION: DATA:**
	☐ TFT Display Inspection Specification: https://www.winstar.com.tw/technology/download.html ☐ Precaution in use of TFT module: https://www.winstar.com.tw/technology/download/declaration.html

SALES BY	APPROVED BY	CHECKED BY	PREPARED BY
			葉虹蘭
ISSUED DATE:	**2025/10/28**		

WINSTAR DISPLAY CO., LTD

MODLE NO：

RECORDS OF REVISION	**DOC. FIRST ISSUE**

VERSION	DATE	REVISED PAGE NO.	**SUMMARY**
0	2025/02/13		First issue
A	2025/03/20		Add PWM definition
B	2025/10/28		Modify type C and Contrast ratio

WINSTAR DISPLAY CO., LTD

Contents

1.Module Classification Information

2.Summary

3.General Specifications

4.Absolute Maximum Ratings

5.Electrical Characteristics

6.Optical Characteristics

7.Interface

8.Reliability

9.Contour Drawing

10.Other

WINSTAR DISPLAY CO.,LTD

1.Module Classification Information

W	F	80	G	S	Y	F	U	M	H	G	V	#
①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩	⑪	⑫	⑬

①	Brand：WINSTAR DISPLAY CORPORATION		
②	Display Type：F→TFT Type, J→Custom TFT		
③	Display Size：8.0” TFT		
④	Model serials no.		
⑤	Backlight Type：	F→CCFL, White S→LED, High Light White	T→LED, White Z→Nichia LED, White
⑥	LCD Polarize Type/ Temperature range/ Gray Scale Inversion Direction	A→Transmissive, N.T, IPS TFT C→Transmissive, N. T, 6:00 ; F→Transmissive, N.T,12:00 ; I→Transmissive, W. T, 6:00 K→Transflective, W.T,12:00 L→Transmissive, W.T,12:00 N→Transmissive, Super W.T, 6:00	Q→Transmissive, Super W.T, 12:00 R→Transmissive, Super W.T, O-TFT V→Transmissive, Super W.T, VA TFT W→Transmissive, Super W.T, IPS TFT X→Transmissive, W.T, VA TFT Y→Transmissive, W.T, IPS TFT Z→Transmissive, W.T, O-TFT
⑦	A：TFT LCD B：TFT+SCREW HOLES+CONTROL BOARD C：TFT+ SCREW HOLES +A/D BOARD D：TFT+ SCREW HOLES +A/D BOARD+CONTROL BOARD E：TFT+ SCREW HOLES +POWER BOARD		F：TFT+CONTROL BOARD G：TFT+ SCREW HOLES H：TFT+D/V BOARD I：TFT+ SCREW HOLES +D/V BOARD J：TFT+POWER BD

⑧ Resolution:

A	128160	B	320234	C	320240	D	480234	E	480272	F	640480
G	800480	H	1024600	I	320480	J	240320	K	800600	L	240400
M	1024768	N	128128	P	1280800	Q	480800	R	640320	S	480128
T	800320	U	8001280	V	176220	W	1280398	X	1024250	Y	1920720
Z	800200	2	1024324	3	7201280	4	19201200	5	1366768	6	1280320

⑨ D: Digital L：LVDS M:MIPI

⑩ Interface:

N	Without control board	A	8Bit	B	16Bit	H	HDMI
I	I2C Interface	R	RS232	S	SPI Interface	U	USB

⑪ TS:

N	Without TS	T	Resistive touch panel	C	Capacitive touch panel (G-F-F)
G	Capacitive touch panel (G-G)			F	Capacitive touch panel (G-F)
C2	Capacitive touch panel (G-F-F)+OCR			G1	Capacitive touch panel (G-G)+OCA
G2	Capacitive touch panel (G-G)+OCR			B	CTP+GG+USB

⑫	Version: X:Raspberry pi ; V: Raspberry pi 3B+	
⑬	Special Code	#:Fit in with ROHS directive regulations

WINSTAR DISPLAY CO. LTD

WINSTAR DISPLAY CO., LTD

2.Summary

TFT 8.0“ is a color active matrix thin film transistor (TFT) liquid crystal display (LCD) that uses amorphous silicon TFT as a switching device. This TFT LCD has a 8.0 (10:16) inch diagonally measured active display area with WXGA (800 horizontal by 1280 vertical pixel) resolution.

WINSTAR DISPLAY CO., LTD

3.General Specifications

Item	Dimension	Unit
Size	8.0	inch
Dot Matrix	800× 3(RGB) ×1280	dots
Module dimension	123.74 × 192.08 × 28.05	mm
Active area	107.64 × 172.224	mm
Pixel pitch	0.13455 x 0.13455	mm
LCD type	TFT, Normally Black, Transmissive	
Viewing angle	85/85/85/85	
Backlight Type	LED,Normally White	
Controller IC	LT6911C	
Electrical Interface (Logic)	DVI	
CTP FW Version	0x07.0x00.0x00.0x00.0x01.0x00.0x83.0x65	
CTP interface	USB	
CTP IC	ILI2130 or equivalent	
CTP Resolution	16384 * 16384	
With /Without TP	With CTP	
Surface	Glare	

*Color tone slight changed by temperature and driving voltage.

WINSTAR DISPLAY CO.,LTD

4.Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	TOP	-20	—	+70	℃
Storage Temperature	TST	-30	—	+80	℃

Note: Device is subject to be damaged permanently if stresses beyond those absolute maximum ratings listed above

1. Temp. ≦ 60℃, 90% RH MAX. Temp.＞60℃, Absolute humidity shall be less than 90% RH at 60℃

WINSTAR DISPLAY CO.,LTD

5.Electrical Characteristics

5.1. Operating conditions:

Item	Symbol	Min	Typ	Max	Unit	Remark
Supply Voltage For LCM	VDD	4.75	5.0	5.25	V	—
Supply Current For LCM	IDD	-	1280	1920	mA	Note 1
LED Life Time	-	50000	-	-	Hr	

Note 1 : This value is test for VDD =5.0V , Ta=25℃ only

Note 2 : Please make sure to support enough current

Note3 : CTP driver is base on the mouse driver program and through USB port connect to PC or embedded board.Can only support the single touch.

Note 4: The “LED life time” is defined as the module brightness decrease to 50% original brightness at Ta=25℃ and IL =480mA. The LED lifetime could be decreased if operating IL is larger than 480mA.

WINSTAR DISPLAY CO., LTD

6.Optical Characteristics

Item		Symbol	Condition.	Min	Typ.	Max.	Unit	Remark
Response time		Tr+ Tf	θ=0°、Φ=0°	-	30	35	.ms	Note 3
Contrast ratio		CR	At optimized viewing angle	640	800	-	-	Note 4
Color Chromaticity	White	Wx	θ=0°、Φ=0	0.248	0.298	0.348		Note 2,6,7
		Wy		0.274	0.324	0.374		
Viewing angle	Hor.	ΘR	CR≧10	80	85	-	Deg.	Note 1
		ΘL		80	85	-		
	Ver.	ΦT		80	85	-		
		ΦB		80	85	-		
Brightness		-	-	800	900	-	cd/m^2	Center of display
Uniformity		(U)	-	70	-	-	%	Note 5

Ta=25±2℃,(ILED2=240mA & ILED1=240mA)
Note 1: Definition of viewing angle range

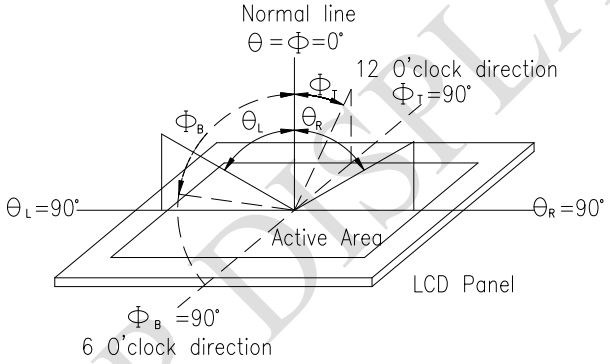


Fig. 6.1. Definition of viewing angle

Note 2: Test equipment setup:
After stabilizing and leaving the panel alone at a driven temperature for 10 minutes, the measurement should be executed. Measurement should be executed in a stable, windless, and dark room. Optical specifications are measured by Topcon BM-7or BM-5 luminance meter 1.0° field of view at a distance of 50cm and normal direction.


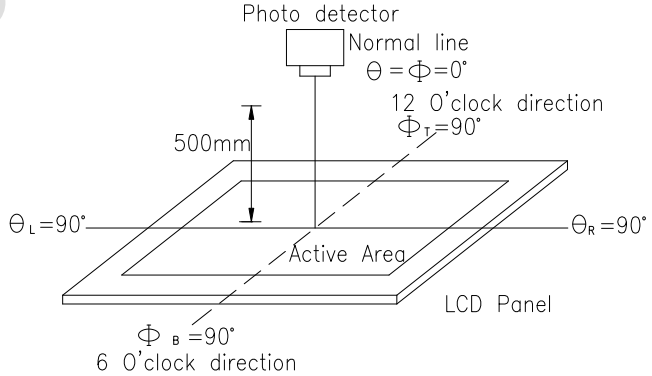


Fig. 6.2. Optical measurement system setup

WINSTAR DISPLAY CO.,LTD

Note 3: Definition of Response time:
The response time is defined as the LCD optical switching time interval between “White” state and “Black” state. Rise time, Tr, is the time between photo detector output intensity changed from 90%to 10%. And fall time, Tf, is the time between photo detector output intensity changed from 10%to 90%

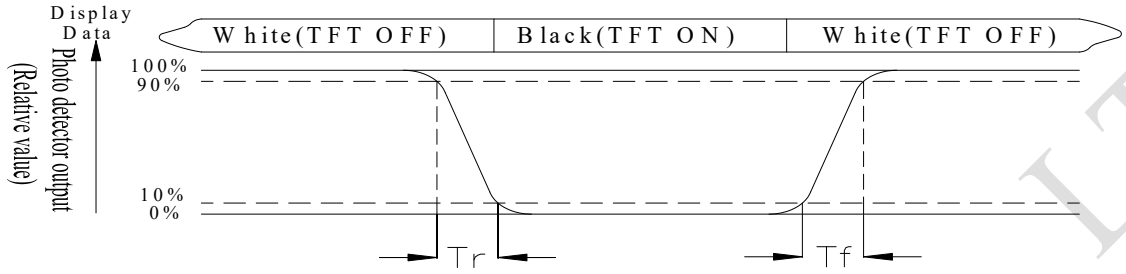

Note 4: Definition of contrast ratio:
The contrast ratio is defined as the following expression.

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD on the "White" state}}{\text{Luminance measured when LCD on the "Black" state}}$$

Note 5: Definition of Luminance Uniformity
Active area is divided into 9 measuring areas (reference the picture in below). Every measuring point is placed at the center of each measuring area.
Luminance Uniformity (U) = Lmin/Lmax x100%
L = Active area length
W = Active area width

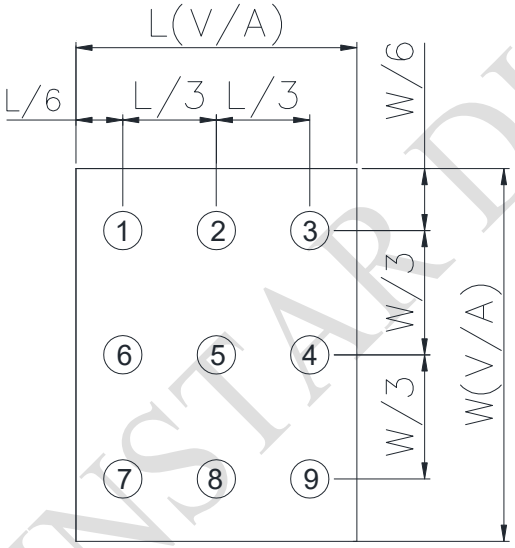


Fig 6.3. Definition of uniformity

Note 6: Definition of color chromaticity (CIE 1931)
Color coordinates measured at the center point of LCD

Note 7: Measured at the center area of the panel when all the input terminals of LCD panel are electrically opened.

WINSTAR DISPLAY CO.,LTD

7.Interface


7.1. LCM PIN Definition(CON3)

Pin No.	Symbol	Function	Remark
1	NC	No connection	
2	5V	Raspberry Pi:Power 5V	
3	GPIO02	Raspberry Pi:GPIO02	
4	5V	Raspberry Pi:Power 5V	
5	GPIO03	Raspberry Pi:GPIO03	
6	GND	Raspberry Pi:GND	
7	GPIO04	Raspberry Pi:GPIO04	
8	GPIO14	Raspberry Pi:GPIO14	
9	GND	Raspberry Pi:GND	
10	GPIO15	Raspberry Pi:GPIO15	
11	GPIO17	Raspberry Pi:GPIO17	
12	BL-PWM GPIO18	Raspberry Pi:GPIO18 (Backlight Enable)	Note 1 Note 2
13	GPIO27	Raspberry Pi:GPIO27	
14	GND	Raspberry Pi:GND	
15	GPIO22	Raspberry Pi:GPIO22	
16	GPIO23	Raspberry Pi:GPIO23	
17	NC	No connection	
18	GPIO24	Raspberry Pi:GPIO24	
19	GPIO10	Raspberry Pi:GPIO10	
20	GND	Raspberry Pi:GND	
21	GPIO09	Raspberry Pi:GPIO09	
22	GPIO25	Raspberry Pi:GPIO25	
23	GPIO11	Raspberry Pi:GPIO11	
24	GPIO08	Raspberry Pi:GPIO08	
25	GND	Raspberry Pi:GND	
26	GPIO07	Raspberry Pi:GPIO07	
27	ID_SD	Raspberry Pi:ID_SD	
28	ID_SC	Raspberry Pi:ID_SC	
29	GPIO05	Raspberry Pi:GPIO05	


WINSTAR DISPLAY CO.,LTD

30	GND	Raspberry Pi:GND	
31	GPIO06	Raspberry Pi:GPIO06	
32	GPIO12	Raspberry Pi:GPIO12	
33	GPIO13	Raspberry Pi:GPIO13	
34	GND	Raspberry Pi:GND	
35	GPIO19	Raspberry Pi:GPIO19	
36	GPIO16	Raspberry Pi:GPIO16	
37	GPIO26	Raspberry Pi:GPIO26	
38	GPIO20	Raspberry Pi:GPIO20	
39	GND	Raspberry Pi:GND	
40	GPIO21	Raspberry Pi:GPIO21	

Note 1: Adjust the PWM signal in order to control LED Backlight's brightness. The higher the duty cycle, the lower the brightness.

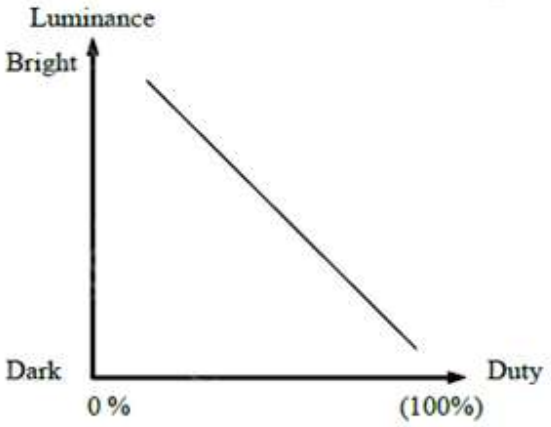

Note 2: PWM signal operation frequency is 10KHz

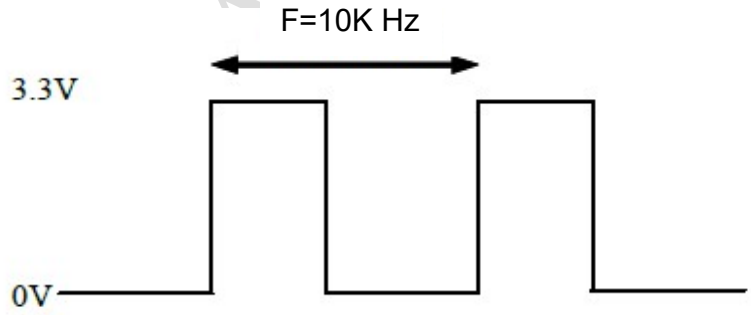

WINTEK CO.,LTD

7.2. (CON4)

Pin No.	Symbol	Function	Remark
1	3.3V	TFT Module Power limit can only output 3.3V,100mA	Note3
2	5V	Raspberry Pi:Power 5V	
3	GPIO02	Raspberry Pi:GPIO02	
4	5V	Raspberry Pi:Power 5V	
5	GPIO03	Raspberry Pi:GPIO03	
6	GND	Raspberry Pi:GND	
7	GPIO04	Raspberry Pi:GPIO04	
8	GPIO14	Raspberry Pi:GPIO14	
9	GND	Raspberry Pi:GND	
10	GPIO15	Raspberry Pi:GPIO15	
11	GPIO17	Raspberry Pi:GPIO17	
12	BL-PWM GPIO18	Raspberry Pi:GPIO18 (Backlight Enable)	
13	GPIO27	Raspberry Pi:GPIO27	
14	GND	Raspberry Pi:GND	
15	GPIO22	Raspberry Pi:GPIO22	
16	GPIO23	Raspberry Pi:GPIO23	
17	3.3V	TFT Module Power limit can only output 3.3V,100mA	Note3
18	GPIO24	Raspberry Pi:GPIO24	
19	GPIO10	Raspberry Pi:GPIO10	
20	GND	Raspberry Pi:GND	
21	GPIO09	Raspberry Pi:GPIO09	
22	GPIO25	Raspberry Pi:GPIO25	
23	GPIO11	Raspberry Pi:GPIO11	
24	GPIO08	Raspberry Pi:GPIO08	
25	GND	Raspberry Pi:GND	
26	GPIO07	Raspberry Pi:GPIO07	
27	ID_SD	Raspberry Pi:ID_SD	
28	ID_SC	Raspberry Pi:ID_SC	
29	GPIO05	Raspberry Pi:GPIO05	
30	GND	Raspberry Pi:GND	
31	GPIO06	Raspberry Pi:GPIO06	

WINSTAR DISPLAY CO.,LTD

32	GPIO12	Raspberry Pi:GPIO12	
33	GPIO13	Raspberry Pi:GPIO13	
34	GND	Raspberry Pi:GND	
35	GPIO19	Raspberry Pi:GPIO19	
36	GPIO16	Raspberry Pi:GPIO16	
37	GPIO26	Raspberry Pi:GPIO26	
38	GPIO20	Raspberry Pi:GPIO20	
39	GND	Raspberry Pi:GND	
40	GPIO21	Raspberry Pi:GPIO21	

Note3: The 3.3V supply current is limited; please pay special attention to use

WINSTAR DISPLAY CO.,LTD

7.3. DVI

Pin No.	Symbol	I/O	Function	Remark
1	Rx2+	I	Channel-2 positive receiver input; low-voltage signal differential- input pair.	
2	GND	P	Ground	
3	Rx2-	I	Channel-2 negative receiver input; low-voltage signal differential- input pair.	
4	Rx1+	I	Channel-1 positive receiver input; low-voltage signal differential- input pair.	
5	GND	P	Ground	
6	Rx1-	I	Channel-1 negative receiver input; low-voltage signal differential- input pair.	
7	Rx0+	I	Channel-0 positive receiver input; low-voltage signal differential- input pair.	
8	GND	P	Ground	
9	Rx0-	I	Channel-0 negative receiver input; low-voltage signal differential- input pair.	
10	RxC+	I	Clock positive receiver input; low-voltage signal differential- input pair.	
11	GND	P	Ground	
12	RxC-	I	Clock negative receiver input; low-voltage signal differential- input pair.	
13-14	NC	-	No connection	
15	SCL	I/O	DDC(Data Display Channel) Clock	
16	SDA	I/O	DDC(Data Display Channel) Data	
17	GND	P	Ground	
18	HDMI_5V	P	Power Supply	
19	Detect	I/O	Hot plug detect	

I: input, O: output, P: Power

WINSTAR DISPLAY CO., LTD

7.4. USB

Pin No	Symbol	Function	Remark
A1	GND	Power Ground	
A4	NC	No connection	
A5	NC	No connection	
A6	D+	Data line +	
A7	D-	Data line -	
A8	NC	No connection	
A9	NC	No connection	
A12	GND	Power Ground	
B12	GND	Power Ground	
B9	NC	No connection	
B8	NC	No connection	
B7	D-	Data line -	
B6	D+	Data line +	
B5	NC	No connection	
B4	NC	No connection	
B1	GND	Power Ground	

WINSTAR DISPLAY CO.,LTD


7.5. PW_5V

Pin No	Symbol	Function	Remark
A1	GND	Power Ground	
A4	VBUS	Power 5V	
A5	CC1	Configuration channel	
A6	NC	No connection	
A7	NC	No connection	
A8	NC	No connection	
A9	VBUS	Power 5V	
A12	GND	Power Ground	
B12	GND	Power Ground	
B9	VBUS	Power 5V	
B8	NC	No connection	
B7	NC	No connection	
B6	NC	No connection	
B5	CC2	Configuration channel	
B4	VBUS	Power 5V	
B1	GND	Power Ground	

WINSTAR DISPLAY CO.,LTD

8.Reliability


Content of Reliability Test (Wide temperature, -20℃~70℃)

Environmental Test			
Test Item	**Content of Test**	**Test Condition**	**Note**
High Temperature storage	Endurance test applying the high storage temperature for a long time.	80℃ 240hrs	2
Low Temperature storage	Endurance test applying the low storage temperature for a long time.	-30℃ 240hrs	1,2
High Temperature Operation	Endurance test applying the electric stress (Voltage & Current) and the thermal stress to the element for a long time.	70℃ 240hrs	2
Low Temperature Operation	Endurance test applying the electric stress under low temperature for a long time.	-20℃ 240hrs	1,2
High Temperature/ Humidity Operation	The module should be allowed to stand at 60℃,90%RH max	60℃,90%RH 96hrs	1,2
Thermal shock resistance	The sample should be allowed stand the following 10 cycles of operation -20℃ 25℃ 70℃  30min 5min 30min 1 cycle	-20℃/70℃ 10 cycles	2
Vibration test	Endurance test applying the vibration during transportation and using.	Total fixed amplitude : 1.5mm Vibration Frequency : 10~55Hz One cycle 60 seconds to 3 directions of X,Y,Z for Each 15 minutes	3
Static electricity test	Endurance test applying the electric stress to the terminal.	VS=±4KV(contact), ±4KV(air), RS=330Ω CS=150pF 10 times	4

Note1: No dew condensation to be observed.
Note2: The function test shall be conducted after 4 hours storage at the normal Temperature and humidity after remove from the test chamber.
Note3: The packing have to including into the vibration testing.
Note4: Endurance test applying the electric stress to the finished product housing

WINSTAR DISPLAY CO., LTD

9.Contour Drawing

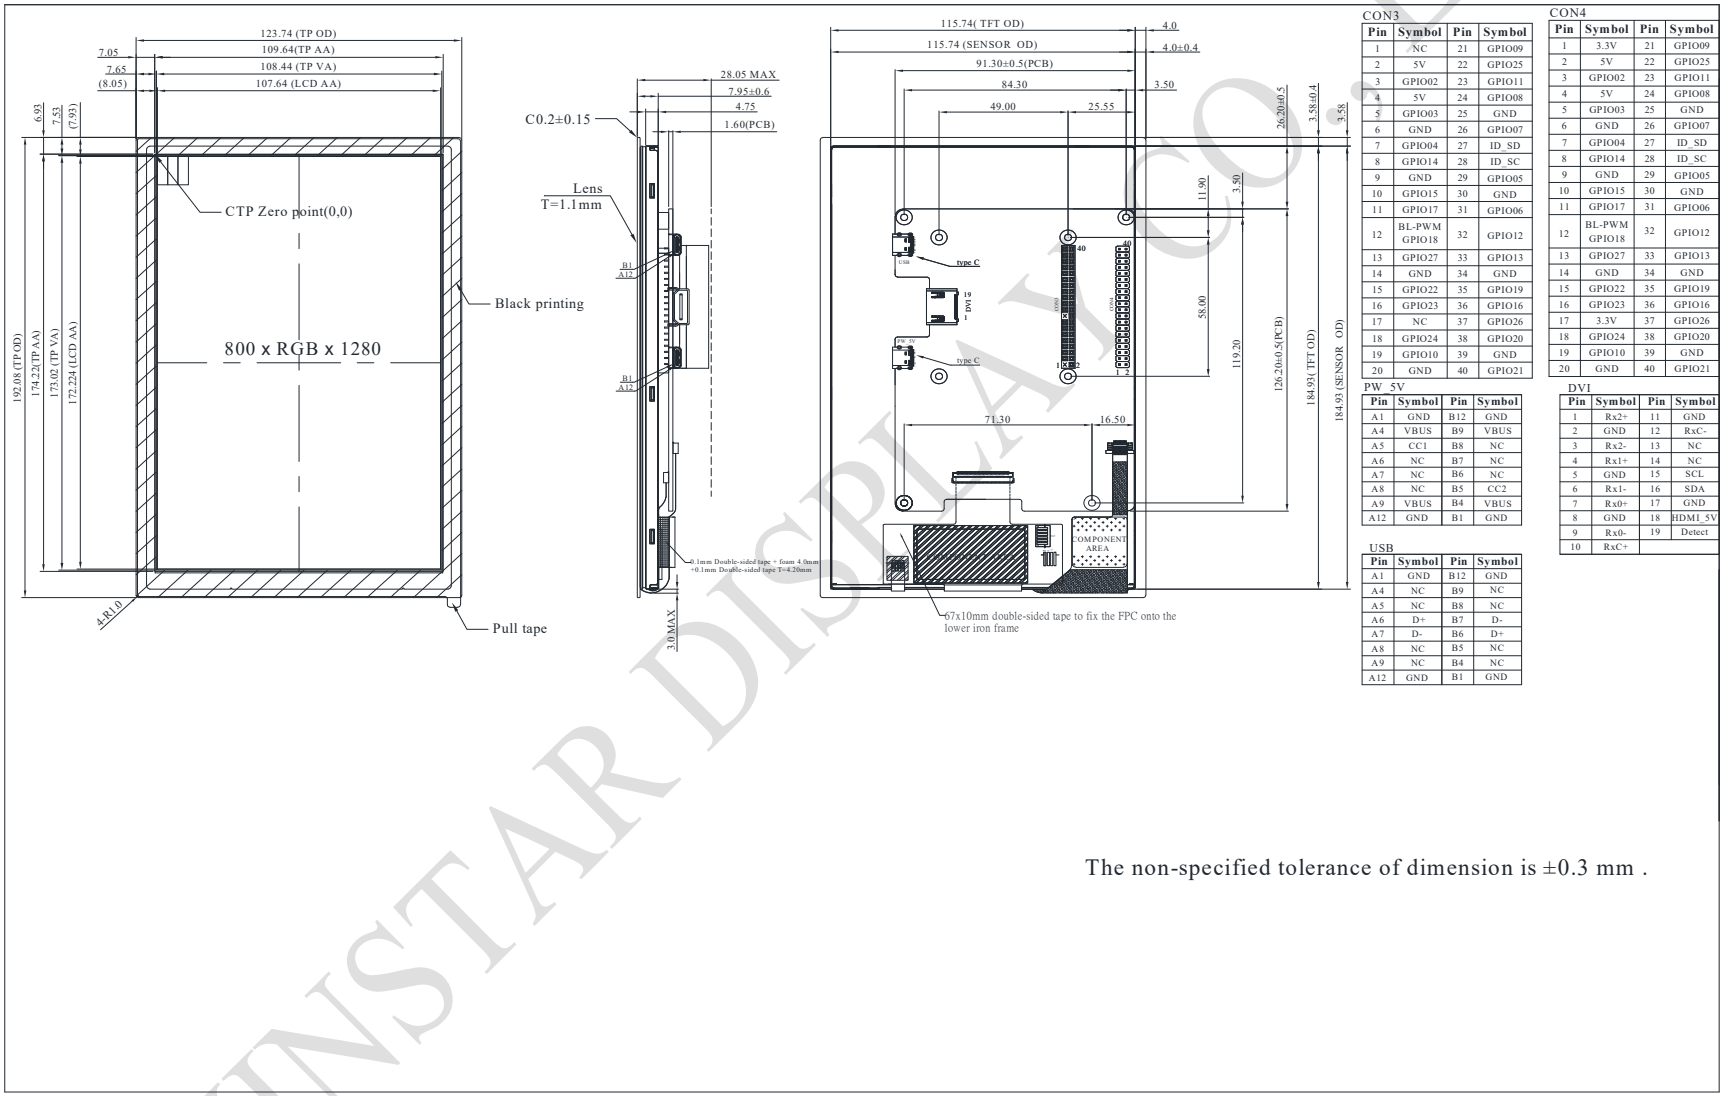

CON3

Pin	Symbol	Pin	Symbol
1	NC	21	GPIO09
2	5V	22	GPIO25
3	GPIO02	23	GPIO11
4	5V	24	GPIO08
5	GPIO03	25	GND
6	GND	26	GPIO07
7	GPIO04	27	ID_SD
8	GPIO14	28	ID_SC
9	GND	29	GPIO05
10	GPIO15	30	GND
11	GPIO17	31	GPIO06
12	BL-PWM GPIO18	32	GPIO12
13	GPIO27	33	GPIO13
14	GND	34	GND
15	GPIO22	35	GPIO19
16	GPIO23	36	GPIO16
17	NC	37	GPIO26
18	GPIO24	38	GPIO20
19	GPIO10	39	GND
20	GND	40	GPIO21

CON4

Pin	Symbol	Pin	Symbol
1	3.3V	21	GPIO09
2	5V	22	GPIO25
3	GPIO02	23	GPIO11
4	5V	24	GPIO08
5	GPIO03	25	GND
6	GND	26	GPIO07
7	GPIO04	27	ID_SD
8	GPIO14	28	ID_SC
9	GND	29	GPIO05
10	GPIO15	30	GND
11	GPIO17	31	GPIO06
12	BL-PWM GPIO18	32	GPIO12
13	GPIO27	33	GPIO13
14	GND	34	GND
15	GPIO22	35	GPIO19
16	GPIO23	36	GPIO16
17	3.3V	37	GPIO26
18	GPIO24	38	GPIO20
19	GPIO10	39	GND
20	GND	40	GPIO21

PW_5V

Pin	Symbol	Pin	Symbol
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	NC
A6	NC	B7	NC
A7	NC	B6	NC
A8	NC	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

DVI

Pin	Symbol	Pin	Symbol
1	Rx2+	11	GND
2	GND	12	RxC-
3	Rx2-	13	NC
4	Rx1+	14	NC
5	GND	15	SCL
6	Rx1-	16	SDA
7	Rx0+	17	GND
8	GND	18	HDMI_5V
9	Rx0-	19	Detect
10	RxC+		

USB

Pin	Symbol	Pin	Symbol
A1	GND	B12	GND
A4	NC	B9	NC
A5	NC	B8	NC
A6	D+	B7	D-
A7	D-	B6	D+
A8	NC	B5	NC
A9	NC	B4	NC
A12	GND	B1	GND

The non-specified tolerance of dimension is ±0.3 mm .

WINSTAR DISPLAY CO.,LTD

winstar

LCM Sample Estimate Feedback Sheet

Module Number： _____ **Page: 1**

1、Panel Specification：

1.	Panel Type：	□ Pass	□ NG , _____
2.	View Direction：	□ Pass	□ NG , _____
3.	Numbers of Dots：	□ Pass	□ NG , _____
4.	View Area：	□ Pass	□ NG , _____
5.	Active Area：	□ Pass	□ NG , _____
6.	Operating Temperature：	□ Pass	□ NG , _____
7.	Storage Temperature：	□ Pass	□ NG , _____
8.	Others： _____		

2、Mechanical

1.	PCB Size：	□ Pass	□ NG , _____
2.	Frame Size：	□ Pass	□ NG , _____
3.	Material of Frame：	□ Pass	□ NG , _____
4.	Connector Position：	□ Pass	□ NG , _____
5.	Fix Hole Position：	□ Pass	□ NG , _____
6.	Backlight Position：	□ Pass	□ NG , _____
7.	Thickness of PCB：	□ Pass	□ NG , _____
8.	Height of Frame to PCB：	□ Pass	□ NG , _____
9.	Height of Module：	□ Pass	□ NG , _____
10.	Others：	□ Pass	□ NG , _____

3、Relative Hole Size：

1.	Pitch of Connector：	□ Pass	□ NG , _____
2.	Hole size of Connector：	□ Pass	□ NG , _____
3.	Mounting Hole size：	□ Pass	□ NG , _____
4.	Mounting Hole Type：	□ Pass	□ NG , _____
5.	Others：	□ Pass	□ NG , _____

4、Backlight Specification：

1.	B/L Type：	□ Pass	□ NG , _____
2.	B/L Color：	□ Pass	□ NG , _____
3.	B/L Driving Voltage (Reference for LED Type)：	□ Pass	□ NG , _____
4.	B/L Driving Current：	□ Pass	□ NG , _____
5.	Brightness of B/L：	□ Pass	□ NG , _____
6.	B/L Solder Method：	□ Pass	□ NG , _____
7.	Others：	□ Pass	□ NG , _____

WINSTAR DISPLAY CO.,LTD

>> Go to page 2 <<

5、Electronic Characteristics of Module：

1.	Input Voltage：	□ Pass	□ NG ,_____
2.	Supply Current：	□ Pass	□ NG ,_____
3.	Driving Voltage for LCD：	□ Pass	□ NG ,_____
4.	Contrast for LCD：	□ Pass	□ NG ,_____
5.	B/L Driving Method：	□ Pass	□ NG ,_____
6.	Negative Voltage Output：	□ Pass	□ NG ,_____
7.	Interface Function：	□ Pass	□ NG ,_____
8.	LCD Uniformity：	□ Pass	□ NG ,_____
9.	ESD test：	□ Pass	□ NG ,_____
10.	Others：	□ Pass	□ NG ,_____

6、Summary：

Sales signature：_____

Customer Signature：_____ **Date**：____/____/____

WINSTAR DISPLAY CO.,LTD