

**WINSTAR Display**

## **OLED SPECIFICATION**


Model No:

***WEO009632C (Hotbar FPC)***


## General Specification

Item	Dimension	Unit
Dot Matrix	96 x 32 Dots	—
Module dimension	19.80 x 12.32 x 1.21	mm
Active Area	16.298 x 5.418	mm
Pixel Size	0.148 x 0.148	mm
Pixel Pitch	0.17 x 0.17	mm
Display Mode	Passive Matrix	
Display Color	Monochrome	
Drive Duty	1/32 Duty	
IC	SSD1315	
Interface	6800, 8080, 4-Wire SPI, I2C	
Size	0.68 inch	

# Contour Drawing & Block Diagram

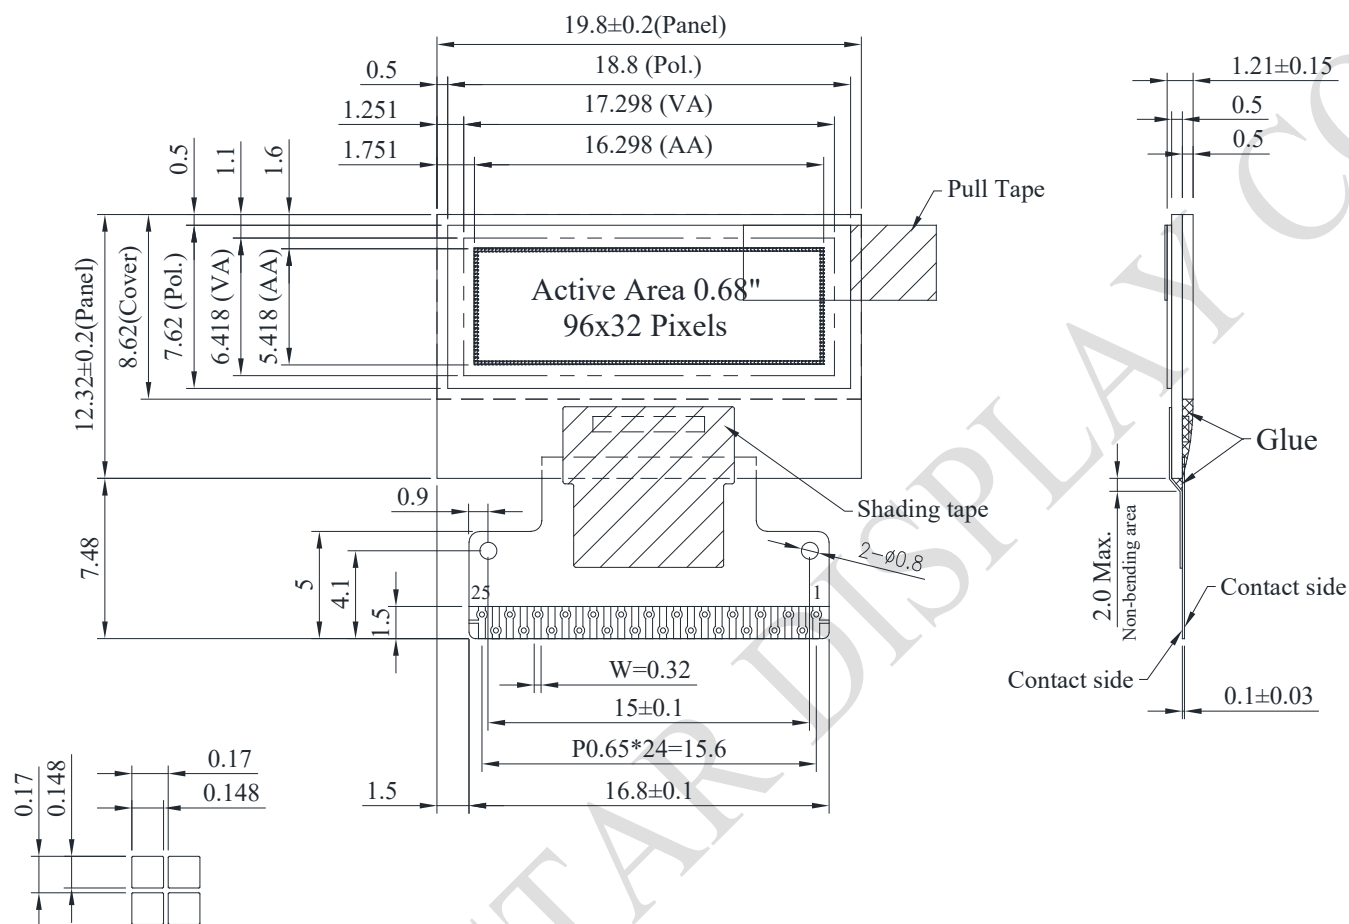

PIN	SYMBOL	PIN	SYMBOL
1	NC	14	E(RD#)
2	VSS	15	R/W#(WR#)
3	VCC	16	D/C#
4	VCOMH	17	RES#
5	IREF	18	CS#
6	D7	19	BS2
7	D6	20	BS1
8	D5	21	VDD
9	D4	22	VDD
10	D3	23	VSS
11	D2	24	VCC
12	D1	25	NC
13	D0		

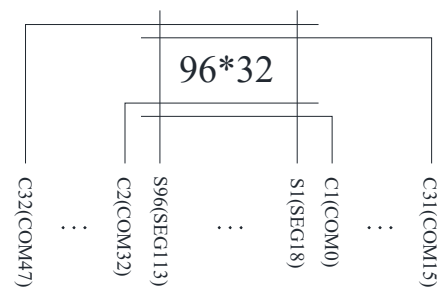

Seg&Com layout

The non-specified tolerance of dimension is  $\pm 0.3$  mm .

# Interface Pin Function

No.	Symbol	Function
1	NC	No connection
2	VSS	Ground pin. It must be connected to external ground.
3	VCC	Power supply for panel driving voltage. This is also the most positive power voltage supply pin.
4	VCOMH	COM signal deselected voltage level. A capacitor should be connected between this pin and VSS.
5	IREF	This is segment output current reference pin. When external IREF is used, a resistor should be connected between this pin and VSS to maintain the IREF current at 30uA.
6	D7	These are 8-bit bi-directional data bus to be connected to the microprocessor's data bus. When serial interface mode is selected, D0 will be the serial clock input: SCLK; D1 will be the serial data input: SDIN. When I2C mode is selected, D2, D1 should be tied together and serve as SDAout, SDAin in application and D0 is the serial clock input, SCL.
7	D6	
8	D5	
9	D4	
10	D3	
11	D2	
12	D1	
13	D0	
14	E(RD#)	This pin is MCU interface input. When 6800 interface mode is selected, this pin will be used as the Enable (E) signal. Read/write operation is initiated when this pin is pulled HIGH and the chip is selected. When 8080 interface mode is selected, this pin receives the Read (RD#) signal. Read operation is initiated when this pin is pulled LOW and the chip is selected. When serial or I2C interface is selected, this pin must be connected to VSS.
15	R/W# (WR#)	This is read / write control input pin connecting to the MCU interface. When interfacing to a 6800-series microprocessor, this pin will be used as Read/Write (R/W#) selection input. Read mode will be carried out when this pin is pulled HIGH (i.e. connect to VDD) and write mode when LOW. When 8080 interface mode is selected, this pin will be the Write (WR#) input. Data write operation is initiated when this pin is pulled LOW and the chip is selected. When serial or I2C interface is selected, this pin must be connected to VSS.
16	D/C#	This pin is Data/Command control pin connecting to the MCU. When the pin is pulled HIGH, the data at D[7:0] will be interpreted as data. When the pin is pulled LOW, the data at D[7:0] will be transferred to a command register. In I2C mode, this pin acts as SA0 for slave address selection.

17	RES#	This pin is reset signal input. When the pin is pulled LOW, initialization of the chip is executed. Keep this pin HIGH (i.e. connect to VDD) during normal operation.	
18	CS#	This pin is the chip select input connecting to the MCU. The chip is enabled for MCU communication only when CS# is pulled LOW (active LOW).	
19	BS2	MCU bus interface selection pins. Select appropriate logic setting as described in the following table. BS2, BS1 are pin select	
20	BS1	BS[2:1]	Interface
		00	4 line SPI
		01	I2C
		11	8-bit 8080 parallel
		10	8-bit 6800 parallel
		Note (1) 0 is connected to VSS (2) 1 is connected to VDD	
21~22	VDD	Power supply pin for core logic operation.	
23	VSS	Ground pin. It must be connected to external ground.	
24	VCC	Power supply for panel driving voltage. This is also the most positive power voltage supply pin.	
25	NC	No connection	

## Absolute Maximum Ratings

Parameter	Symbol	Min	Typ.	Max	Unit
Supply Voltage for Logic	VDD	-0.3	-	4	V
Supply Voltage for Display	VCC	0	-	18	V
Operating Temperature	TOP	-40	-	+80	°C
Storage Temperature	TSTG	-40	-	+85	°C

## Electrical Characteristics

### 1 DC Characteristics

Item	Symbol	Condition	Min	Typ	Max	Unit
Supply Voltage for Logic	VDD	—	1.65	3.0	3.3	V
Supply Voltage for Display	VCC	—	7.5	12.0	12.5	V
High Level Input	VIH	—	0.8×VDD	—	VDD	V
Low Level Input	VIL	—	0	—	0.2×VDD	V
High Level Output	VOH	I <sub>out</sub> = 100uA	0.9×VDD	—	VDD	V
Low Level Output	VOL	I <sub>out</sub> = 100uA	0	—	0.1×VDD	V
Display 50% Pixel on	ICC	—	—	3.0	4.5	mA