

TFT DISPLAY SPECIFICATION



WINSTAR Display Co.,Ltd.
華凌光電股份有限公司



Winstar Display Co., LTD

華凌光電股份有限公司



WEB: <https://www.winstar.com.tw> E-mail: sales@winstar.com.tw

SPECIFICATION

MODULE NO.: WF104GSWAMLNN0#

General Specifications

Item	Dimension	Unit
Size	10.4	inch
Dot Matrix	1024 x RGB x 768 (TFT)	dots
Module dimension	230 x 180.2 x 12.4	mm
Active area	210.432 x 157.824	mm
Pixel pitch	0.2055 x 0.2055	mm
LCD type	TFT, Normally Black, Transmissive	
Viewing Angle	80/80/80/80 min	
Aspect Ratio	4:3	
TFT Interface	LVDS	
Backlight Type	LED, Normally White	
Touch Panel	Without Touch Panel	
Surface	Anti-Glare	
Screw torque	M2 Min:1.4 Max:2.2 (Unit, Kgf.cm) M3 Min:2.0 Max:2.4 (Unit, Kgf.cm)	
Assembly Instructions	Need to use edge measuring keyholes to perform fixing and support	

*Color tone slight changed by temperature and driving voltage.

Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	TOP	-30	—	+80	°C
Storage Temperature	TST	-30	—	+80	°C

Electrical Characteristics

Operating conditions

Item	Symbol	Standard Value			Unit
		Min	Typ	Max	
Power voltage	V_{DD}	3.0	3.3	3.6	V
Input logic high voltage	V_{IH}	$0.7 V_{DD}$	-	V_{DD}	V
Input logic low voltage	V_{IL}	0	-	$0.3 V_{DD}$	V
Current for Power	I_{VDD}		385	424	mA

Interface


1. LCM PIN Definition (CON1)

Pin	Symbol	Function
1-2	VDD	Power supply: + 3.3V
3-4	GND	Ground
5	Link0-	0- LVDS differential data input
6	Link0+	0+ LVDS differential data input
7	GND	Ground
8	Link1-	1- LVDS differential data input
9	Link1+	1+ LVDS differential data input
10	GND	Ground
11	Link2-	2- LVDS differential data input
12	Link2+	2+ LVDS differential data input
13	GND	Ground
14	CLKIN-	- LVDS differential clock input
15	CLKIN+	+ LVDS differential clock input
16	GND	Ground
17	Link3-	3- LVDS differential data input
18	Link3+	3+ LVDS differential data input
19	MODE	LVDS 6/8 bit select function control, Low or NC →6bit Input Mode; High →8bit Input Mode
20	SC	Scan direction selector (Low: Normal ;High: Reverse)

2. CON2

Pin	Symbol	Function
1-2	VLED 12V	12V input
3-4	GND	Ground
5	BLEN	Backlight ON-OFF
6	LED PWM	Light Dimming Control (PWM) Input Voltage (Low active)

Contour Drawing

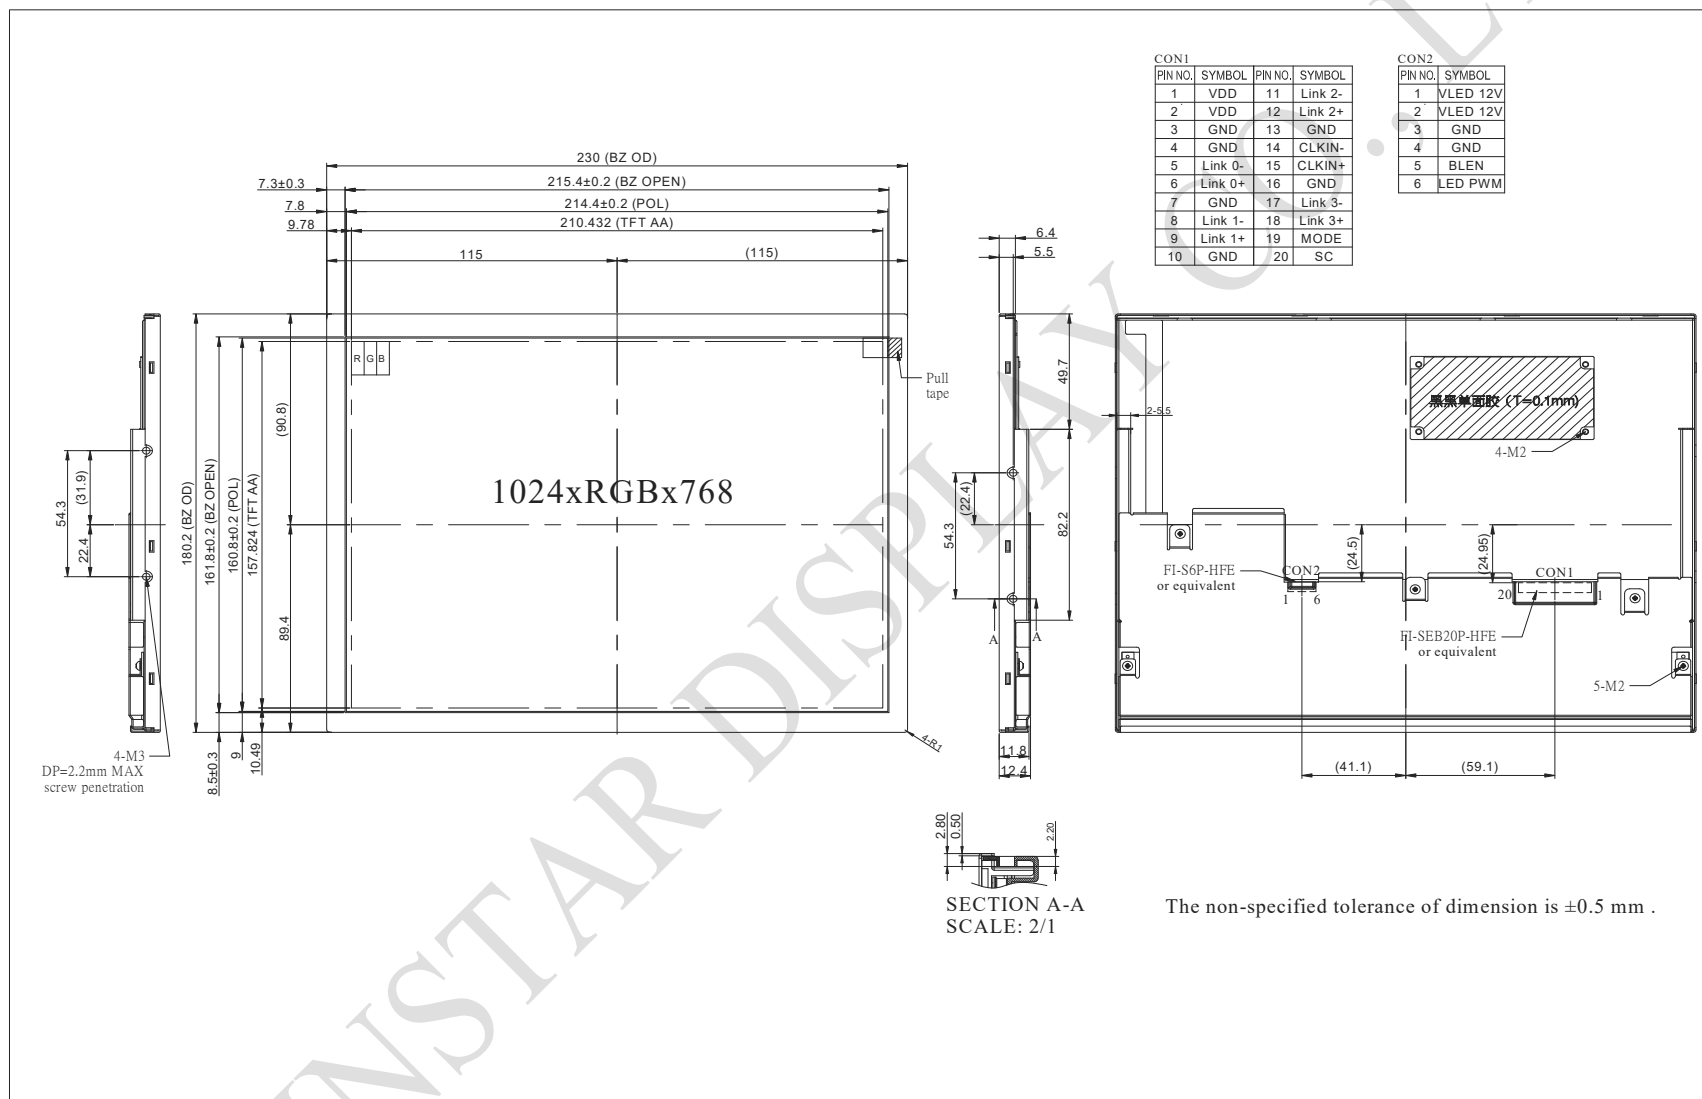

The non-specified tolerance of dimension is ±0.5 mm .