

WINSTAR Display

OLED SPECIFICATION



Model No:

WEA012832P



General Specification

Item	Dimension	Unit
Dot Matrix	128 x 32 Dots	—
Module dimension	60.0 x 18.75 x 5.96 (MAX)	mm
Active Area	42.22 x 10.54	mm
Pixel Size	0.308 x 0.308	mm
Pixel Pitch	0.33 x 0.33	mm
Display Mode	Passive Matrix	
Display Color	Monochrome	
Drive Duty	1/32 Duty	
IC	CH1115	
Interface	4-Wire SPI	
Size	1.71 inch	

Figure 1: Mechanical drawing of the sensor module. The drawing shows a rectangular module with various dimensions and labels. Key dimensions include: total width 50.5±0.2, total height 13.75±0.2, and active area 1.71" (128x32 Pixels). Specific width dimensions from the left edge are: 14.75(Pol.), 12.54(VA), 10.54(AA), and 4.5±0.5. Specific height dimensions from the top edge are: 0.5±0.5, 1.25, 2.25, 1.5±0.5, 1.61, and 2.61. A 'Pull Tape' is indicated on the right side.

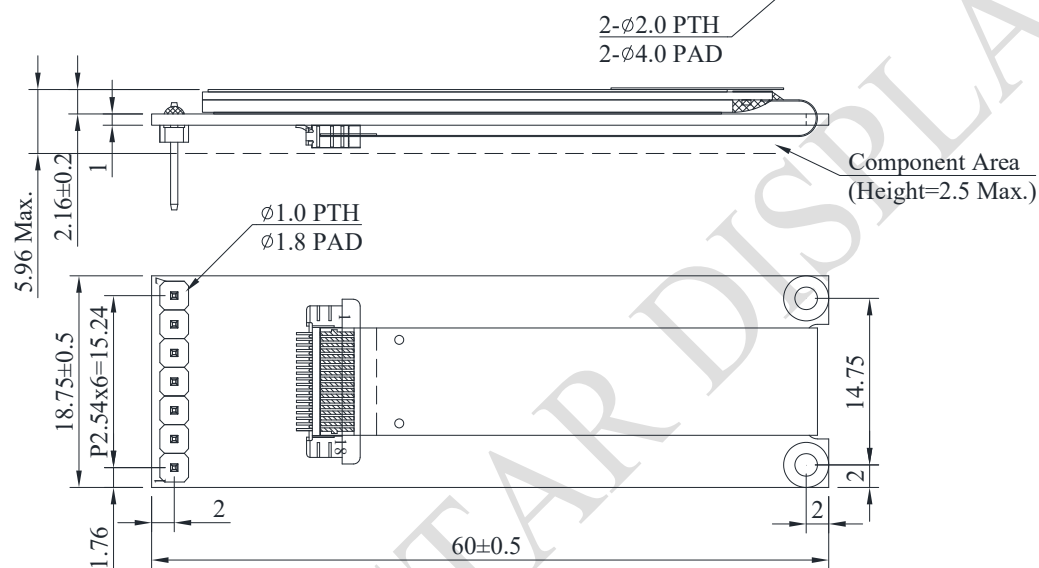

PIN	SYMBOL
1	GND
2	VCC
3	D0
4	D1
5	RES#
6	D/C#
7	CS#

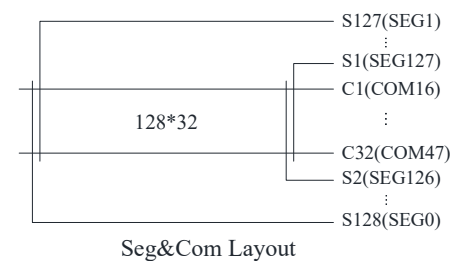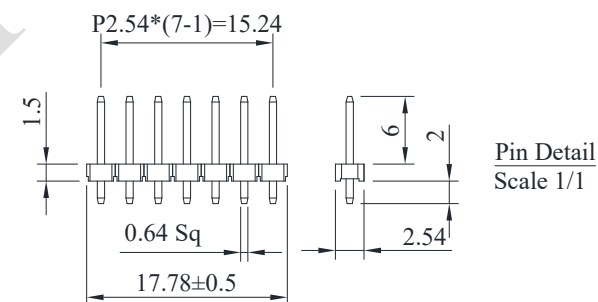

WINSTAR

Interface Pin Function

No.	Symbol	Function
1	GND	Ground.
2	VCC	Power supply pin for logic.
3	D0	When the serial interface is selected, then D0 serves as the serial clock input pad (SCL) and D1 serves as the serial data input pad (SI).
4	D1	
5	RES#	This is a reset signal input pad. When RES# is set to "L", the settings are initialized. The reset operation is performed by the RES# signal level.
6	D/C#	This is the Data/Command control pad that determines whether the data bits are data or a command. D/C = "H": the inputs at D0 and D1 are treated as display data. D/C = "L": the inputs at D0 and D1 are transferred to the command registers.
7	CS#	This pad is the chip select input. When CS# = "L", then the chip select becomes active, and data/command I/O is enabled.

Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
Supply Voltage for Logic	VCC	-0.3	3.6	V
Operating Temperature	TOP	-40	+80	°C
Storage Temperature	TSTG	-40	+85	°C

Electrical Characteristics

DC Electrical Characteristics

Item	Symbol	Condition	Min	Typ	Max	Unit
Supply Voltage for Logic	VCC	—	2.5	3.0	3.3	V
High Level Input	VIH	—	0.8×VCC	—	VCC	V
Low Level Input	VIL	—	GND	—	0.2×VCC	V
High Level Output	VOH	—	0.8×VCC	—	VCC	V
Low Level Output	VOL	—	GND	—	0.2×VCC	V
Display 50% Pixel on	ICC	VCC =3V	—	15	30	mA