



WINSTAR Display Co.,Ltd.
華凌光電股份有限公司



Winstar Display Co., LTD

華凌光電股份有限公司



WEB: <https://www.winstar.com.tw> E-mail: sales@winstar.com.tw

SPECIFICATION

CUSTOMER :

MODULE NO.: WF43HTIAEDNBB#

General Specifications

Item	Dimension	Unit
Size	4.3	inch
Dot Matrix	480 x RGBx272(TFT)	dots
Module dimension	132.0 x 96.0 x 4.95	mm
Active area	95.04 x 53.856	mm
Dot pitch	0.066 x 0.198	mm
LCD type	TFT, Normally White, Transmissive	
View Direction	12 o'clock	
Gray Scale Inversion Direction	6 o'clock	
TFT Driver IC	ST7282-G4-1B	
TFT Interface	24-bit RGB	
Aspect Ratio	16:9	
Backlight Type	LED, Normally White	
PCAP IC	ILI2511	

PCAP Interface	USB (I2C available)
PCAP FW Version:	V 6. 0. 0. 0. 43.29.0.1
Touch Panel	Projected Capacitive Touch Screen(PCAP)
Surface	Glare

WINSTAR DISPLAY CO., LTD

Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	TOP	-20	—	+70	°C
Storage Temperature	TST	-30	—	+80	°C

Electrical Characteristics

Operating conditions:

Item	Symbol	Condition	Min	Typ	Max	Unit
Power Supply For Voltage	VDD	—	3.0	3.3	3.6	V
Power Supply For Current	IDD	—	—	22	33	mA
Supply Voltage For Touch Logic (USB Type)	VDDT	—	4.4	5.0	5.5	V

Interface

LCM PIN Definition


Pin	Symbol	Function
1	VLED-	Power for LED backlight cathode
2	VLED+	Power for LED backlight anode
3	GND	Power ground
4	VDD	Power voltage
5	R0	Red data (LSB)
6	R1	Red data
7	R2	Red data
8	R3	Red data
9	R4	Red data
10	R5	Red data
11	R6	Red data
12	R7	Red data (MSB)
13	G0	Green data (LSB)
14	G1	Green data
15	G2	Green data
16	G3	Green data
17	G4	Green data
18	G5	Green data
19	G6	Green data
20	G7	Green data (MSB)
21	B0	Blue data (LSB)
22	B1	Blue data
23	B2	Blue data
24	B3	Blue data
25	B4	Blue data
26	B5	Blue data
27	B6	Blue data
28	B7	Blue data (MSB)
29	GND	Power ground
30	CLK	Pixel clock

31	DISP	Display on/off
32	HSYNC	Horizontal sync signal; negative polarity
33	VSYNC	Vertical sync signal; negative polarity
34	DE	Data Enable
35	NC	No connection
36	GND	Power ground
37	NC	No connect
38	NC	No connect
39	NC	No connect
40	NC	No connect

CTP PIN Definition

Pin	Symbol	Function
1	USB_VSS	System ground
2	USB_VDD 5V	Power supply
3	USB_D+	Data +
4	USB_D-	Data -
5	VSS	System ground
6	SDA	I2C data input and output
7	SCL	I2C clock input
8	RST	External Reset, Low is active
9	INT	External interrupt to the host
10	VDDT 3.3	Power supply

Contour Drawing

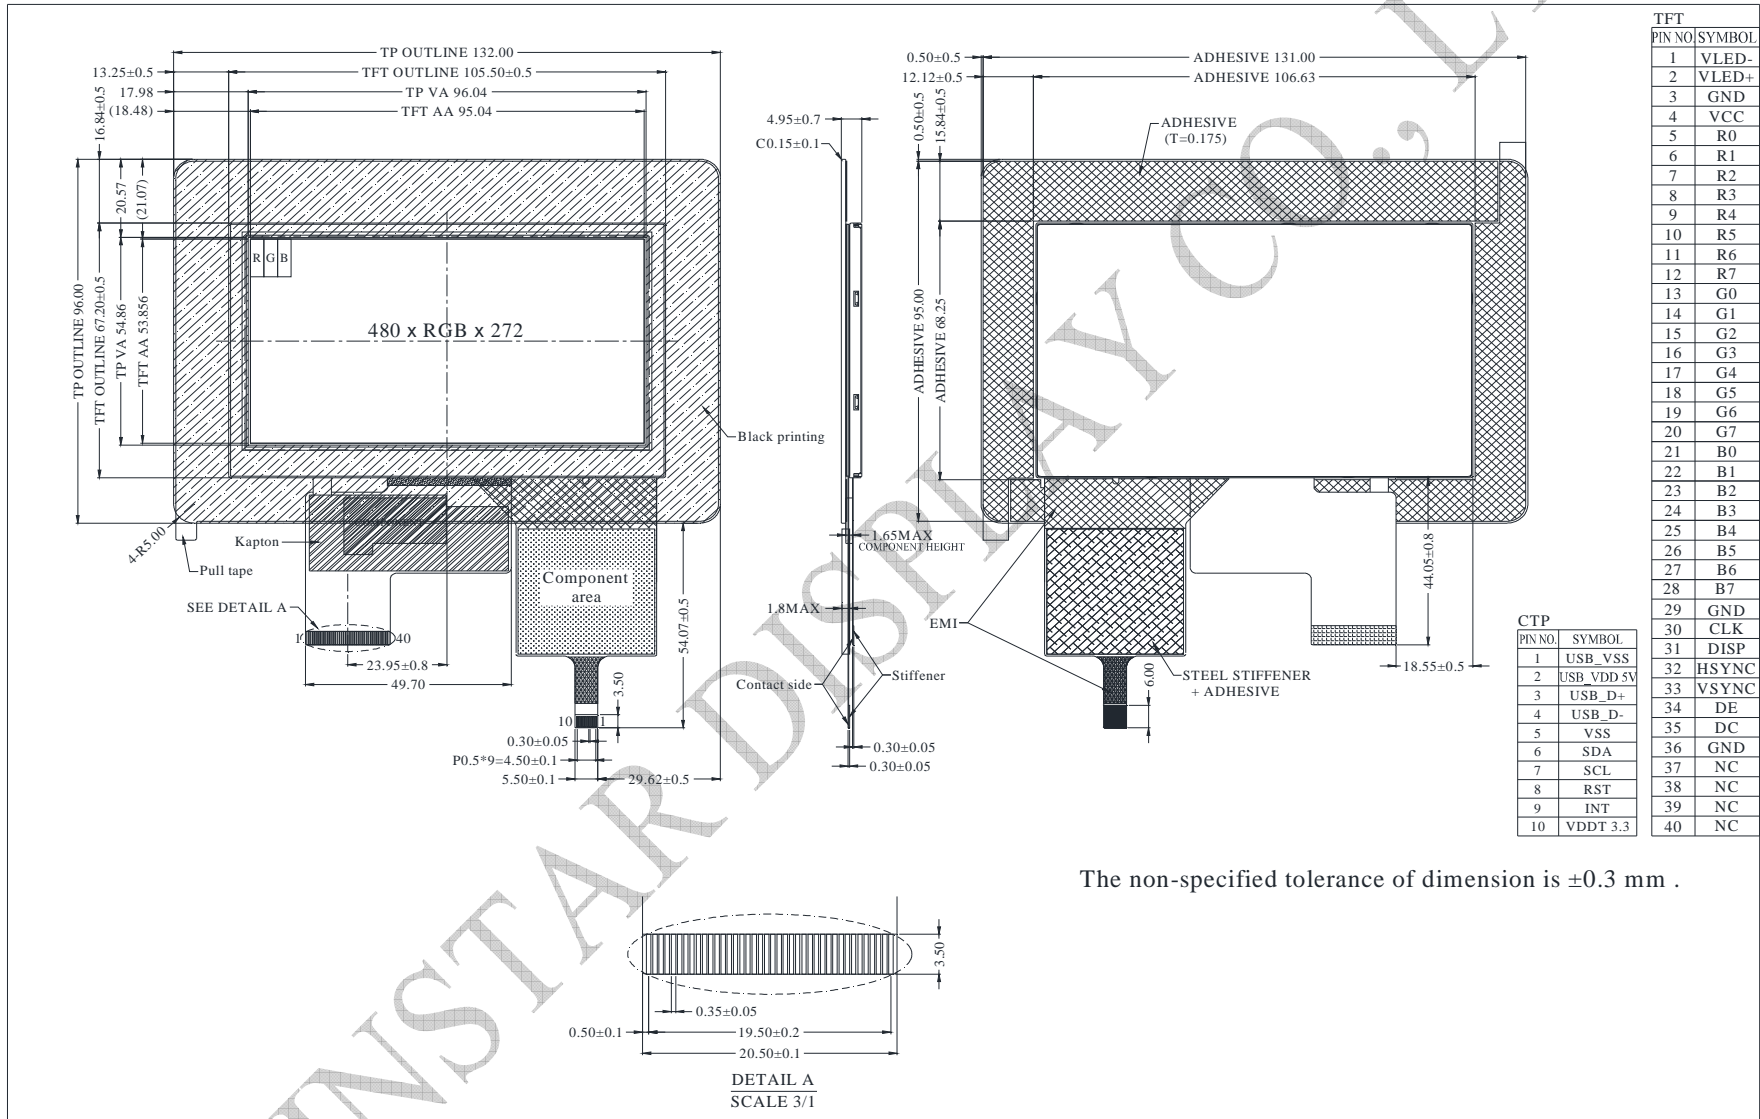

The non-specified tolerance of dimension is ±0.3 mm .