

TFT DISPLAY SPECIFICATION



WINSTAR Display Co.,Ltd.
華凌光電股份有限公司



Winstar Display Co., LTD

華凌光電股份有限公司



WEB: <https://www.winstar.com.tw> E-mail: sales@winstar.com.tw

SPECIFICATION

MODULE NO.: WF57VTCECLNNO#

General Specifications

Item	Dimension	Unit
Size	5.7	inch
Dot Matrix	320 x RGBx240(TFT)	dots
Module dimension	160.0(W) x 109.0(H) x 15.0(D)	mm
Active area	115.20 x 86.40	mm
Dot pitch	0.12 x 0.36	mm
LCD type	TFT, Normally White, Transmissive	
View Direction	12 o'clock	
Gray Scale Inversion Direction	6 o'clock	
TFT IC	SN75LVDS82DGGR or Equivalent	
TFT interface	LVDS	
Aspect Ratio	4:3	
Backlight Type	LED, Normally White	
Touch Panel	Without Touch Panel	
Surface	Glare	

Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	TOP	0	—	+70	°C
Storage Temperature	TST	-30	—	+80	°C

Electrical Characteristics

1. Operating conditions:

Item	Symbol	Condition	Min	Typ	Max	Unit
Supply Voltage For LCM	VCC	—	3.0	3.3	3.6	V
Supply Current For LCM	ICC	—	—	220	330	mA
Input High Volt.	VIH	—	0.7 VCC	—	VCC	V
Input Low Volt.	VIL	—	0	—	0.3 VCC	V

2. LED driving conditions


Parameter	Symbol	Min.	Typ.	Max.	Unit
LED current	-	-	140	-	mA
Power Consumption	-	1260	-	1470	mW
LED voltage	VBL+	9.0	-	10.5	V
LED Life Time	-	-	50,000	-	Hr

Interface

LCM PIN Definition

Pin	Symbol	Function
1	LED+	Power supply for Backlight +
2	LED-	Power supply for Backlight -
3	RX3+	+ LVDS differential data input
4	RX3-	- LVDS differential data input
5	GND	Ground
6	RXC+	+ LVDS differential clock input
7	RXC-	- LVDS differential clock input
8	GND	Ground
9	RX2+	+ LVDS differential data input
10	RX2-	- LVDS differential data input
11	GND	Ground
12	RX1+	+ LVDS differential data input
13	RX1-	- LVDS differential data input
14	GND	Ground
15	RX0+	+ LVDS differential data input
16	RX0-	- LVDS differential data input
17	L/R	Shift direction of device internal shift register control.
18	U/D	Up/down selection
19	VCC	Digital power: 3V~3.6V
20	VCC	Digital power: 3V~3.6V
21-29	NC	No connection
30	RESET	Hardware reset

Contour Drawing

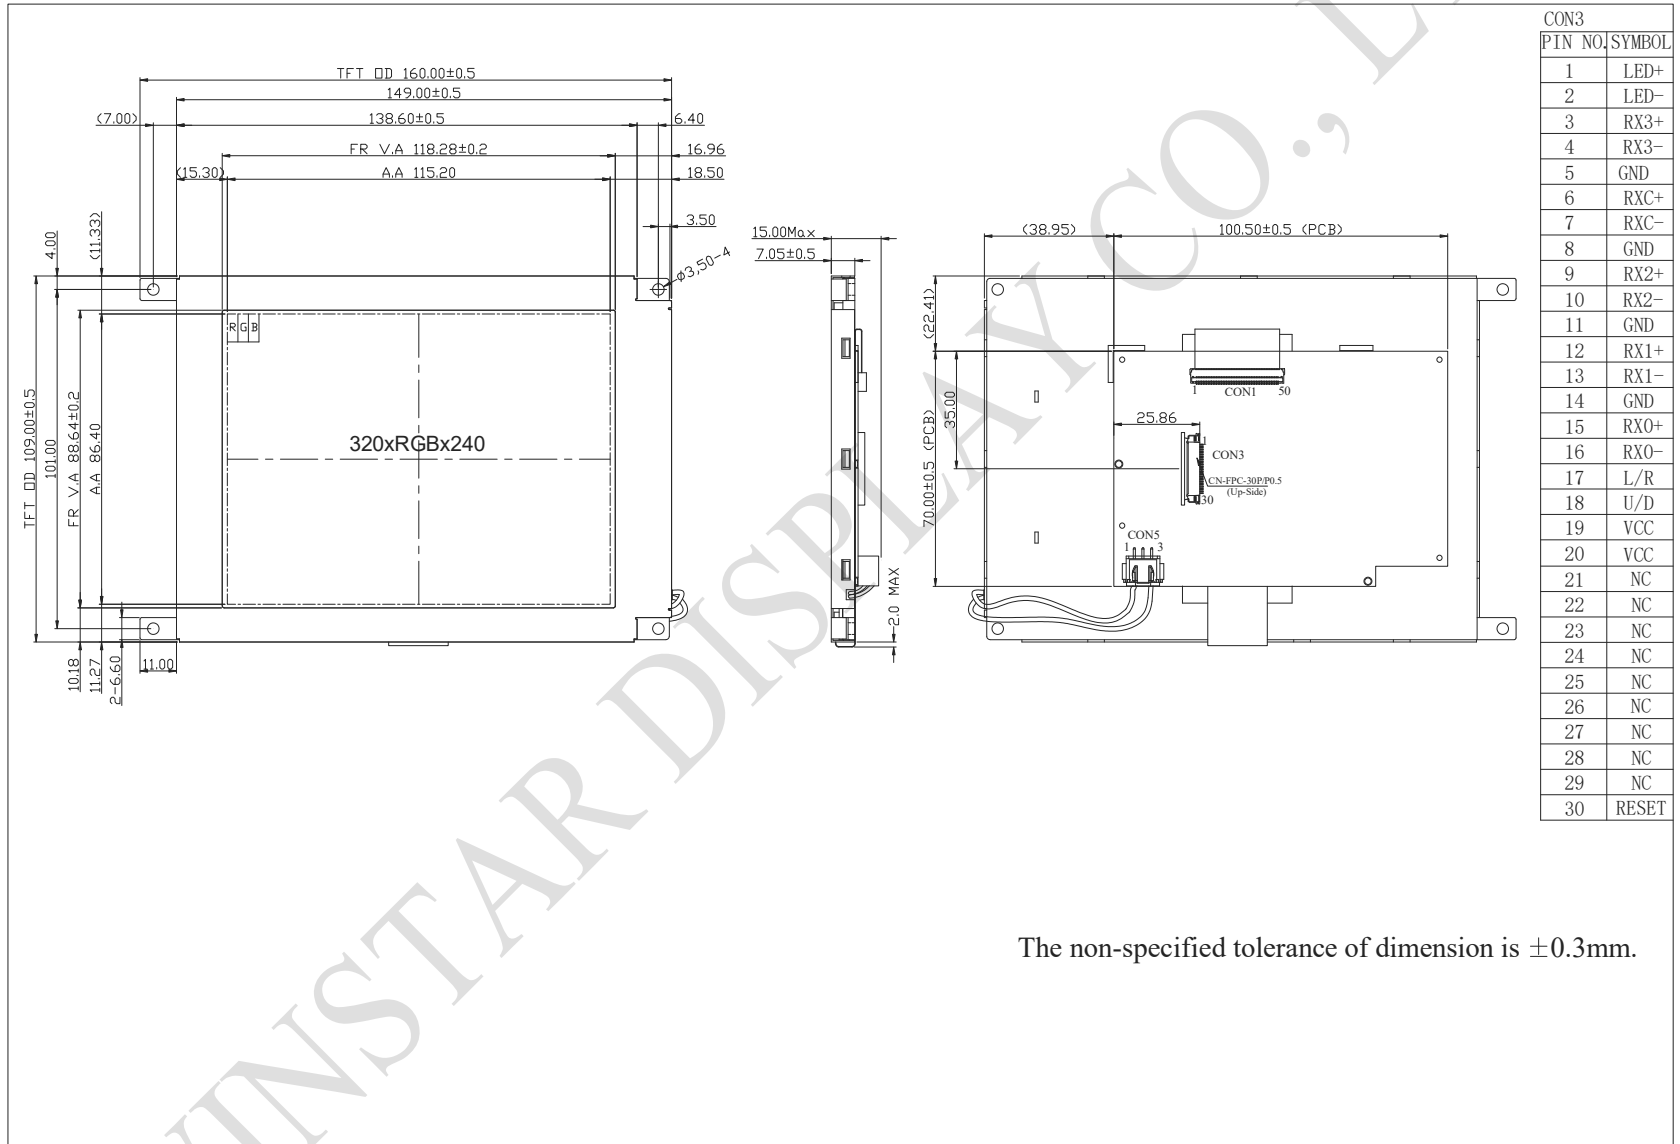

The non-specified tolerance of dimension is $\pm 0.3\text{mm}$.