

# TFT DISPLAY SPECIFICATION



**WINSTAR Display Co.,Ltd.**  
**華凌光電股份有限公司**



# Winstar Display Co., LTD

## 華凌光電股份有限公司



WEB: <https://www.winstar.com.tw> E-mail: sales@winstar.com.tw

### SPECIFICATION

**MODULE NO.: WF101NSYA4LNG0**

### General Specifications

Item	Dimension	Unit
Size	10.1	inch
Dot Matrix	1920(H) X RGB X 1200(V)	dots
Module dimension	257.96 x 168.6 x 12.33 Max	mm
Active area	216.8064(H) x 135.504(V)	mm
Pixel pitch	0.11292(H) x 0.11292(V)	mm
LCD type	TFT, Normally Black, Transmissive	
Interface	2ch-LVDS	
Driver IC	FL5893DA	
Viewing Angle	80/80/80/80(IPS)	
Aspect Ratio	16:10	
PCAP IC	GT928	
PCAP Interface	I2C	
PCAP FW Version	82	
PCAP Resolution	1920 * 1200	
Backlight Type	LED, Normally White	
Touch Panel	With PCAP	
Surface	Glare	

\*Color tone slight changed by temperature and driving voltage.

# Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	TOP	-20	—	+70	°C
Storage Temperature	TST	-30	—	+80	°C

# Electrical Characteristics

## Operation Conditions

Item	Symbol	Min	Typ.	Max.	Unit
Power Supply Voltage	VDDIN	3.0	3.3	3.6	V
	VRP	-	-	300	mV
Power Supply Current	IDD	-	300	360	mA
Power Consumption	PLCD	-	1	1.2	W
Rush current	IRUSH	-	-	3.0	A
Supply PCAP	VDDT	3.1	3.3	3.5	V
	IVDDT	—	73	110	mA

# Interface

## TFT LCD MODULE


Pin No.	Symbol	Description
1-5	NC	No connection
6	GND	Ground
7	ELV3P	EVEN LVDS Positive data signal (+)
8	ELV3N	EVEN LVDS Negative data signal (-)
9	GND	Ground
10	ELV2P	EVEN LVDS Positive data signal (+)
11	ELV2N	EVEN LVDS Negative data signal (-)
12	GND	Ground
13	ELVCLKP	EVEN LVDS Positive CLK signal (+)
14	ELVCLKN	EVEN LVDS Negative CLK signal (-)
15	GND	Ground
16	ELV1P	EVEN LVDS Positive data signal (+)
17	ELV1N	EVEN LVDS Negative data signal (-)
18	GND	Ground
19	ELV0P	EVEN LVDS Positive data signal (+)
20	ELV0N	EVEN LVDS Negative data signal (-)
21	GND	Ground
22	OLV3P	Odd LVDS Positive data signal (+)
23	OLV3N	Odd LVDS Negative data signal (-)
24	GND	Ground
25	OLV2P	Odd LVDS Positive data signal (+)
26	OLV2N	Odd LVDS Negative data signal (-)
27	GND	Ground
28	OLVCLKP	Odd LVDS Positive CLK signal (+)
29	OLVCLKN	Odd LVDS Negative CLK signal (-)
30	GND	Ground
31	OLV1P	Odd LVDS Positive data signal (+)
32	OLV1N	Odd LVDS Negative data signal (-)
33	GND	Ground
34	OLV0P	Odd LVDS Positive data signal (+)

35	OLV0N	Odd LVDS Negative data signal (-)
36	GND	Ground
37 -39	NC	No connection (PIN39 and PIN40 cannot be short-circuited together)
40	NC	No connection alone
41-45	VDDIN	Power supply VDDIN=3.3V (Typ.)

#### PCAP PIN Definition

Pin	Symbol	Function
1	SDA	I2C data input and output
2	SCL	I2C clock input
3	RST	External Reset, Low is active
4	INT	External interrupt to the host
5	VDDT	Power Supply : +3.3V
6	VSS	Ground for analog circuit

# Contour Drawing

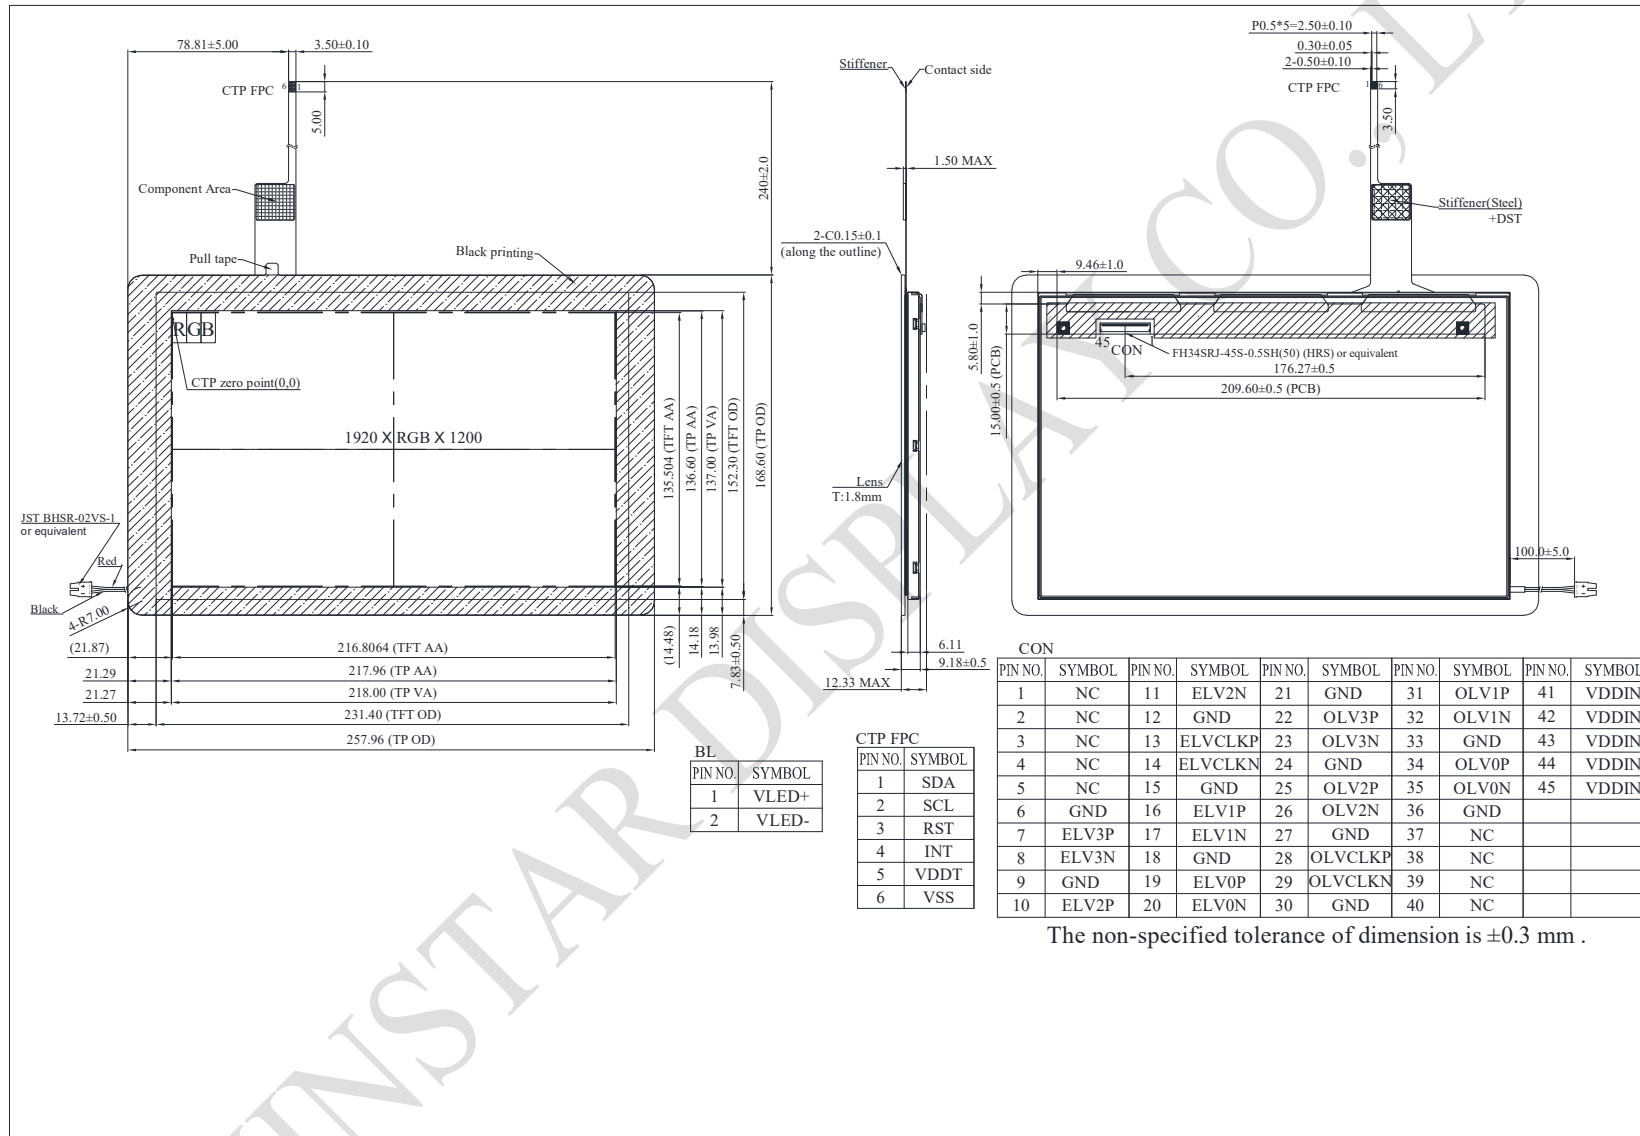

The non-specified tolerance of dimension is ±0.3 mm .